


## F-Series Chest Freezer - Oblique Curved Glass Lid




G-F98 OCG / G-F148 OCG / G-F198 OCG



G-F298 OCG / G-F398 OCG / G-F498 OCG / G-F598 OCG

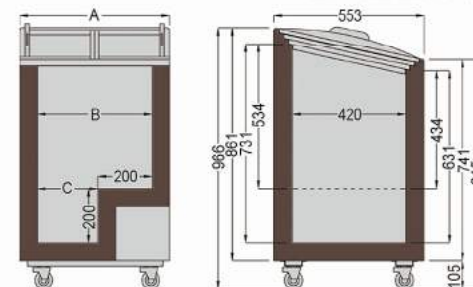

|   | G-F98 OCG | G-F148 OCG | G-F198 OCG |
|---|-----------|------------|------------|
| A | 553 mm    | 753 mm     | 953 mm     |
| B | 420 mm    | 620 mm     | 820 mm     |
| C | 220 mm    | 420 mm     | 620 mm     |

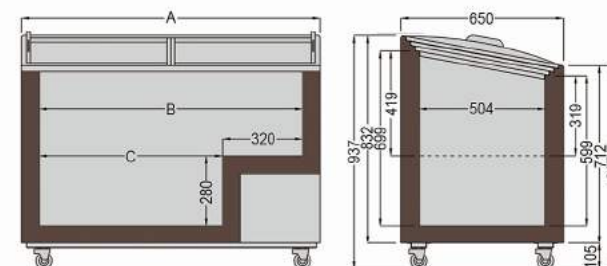

|   | G-F298 OCG | G-F398 OCG | G-F498 OCG | G-F598 OCG |
|---|------------|------------|------------|------------|
| A | 1195 mm    | 1395 mm    | 1795 mm    | 1995 mm    |
| B | 1049 mm    | 1249 mm    | 1649 mm    | 1849 mm    |
| C | 729 mm     | 929 mm     | 1329 mm    | 1529 mm    |

## Features

- ◆ 75mm insulation.
- ◆ A+ level power consumption, save energy.
- ◆ Temperature display.
- ◆ Drainage is on front, easy to collect water.
- ◆ Internal round edges, easy to clean.
- ◆ Quickly and deeply freezing.
- ◆ Low noise design.
- ◆ Lock is optional.
- ◆ HC refrigerant

| Model      | Ext. Dimension<br>W×D×H (mm) | Int. Dimension<br>W×D×H (mm) | Capacity<br>Gross/Net(L) | Temperature<br>(°C) | Power Supply |
|------------|------------------------------|------------------------------|--------------------------|---------------------|--------------|
| G-F98 OCG  | 553×553×881/760              | 420×420×646/546              | 101/93                   | -18 ~ -25°C         | 230V/50Hz    |
| G-F148 OCG | 753×553×881/760              | 620×420×646/546              | 159/146                  | -18 ~ -25°C         | 230V/50Hz    |
| G-F198 OCG | 953×553×881/760              | 820×420×646/546              | 216/199                  | -18 ~ -25°C         | 230V/50Hz    |
| G-F298 OCG | 1195×650×852/732             | 1049×504×614/514             | 296/270                  | -18 ~ -25°C         | 230V/50Hz    |
| G-F398 OCG | 1395×650×852/732             | 1249×504×614/514             | 361/330                  | -18 ~ -25°C         | 230V/50Hz    |
| G-F498 OCG | 1795×650×852/732             | 1649×504×614/514             | 492/451                  | -18 ~ -25°C         | 230V/50Hz    |
| G-F598 OCG | 1995×650×852/732             | 1849×504×614/514             | 558/511                  | -18 ~ -25°C         | 230V/50Hz    |