

UNIQUE SELLING PROPOSITION



Distinctive design & solid appearance



Quiet operating system & easy maintenance



Energy efficient system & environmentally safe refrigerant



Powerful & consistent cooling performance

HIGHLIGHT & FEATURES

CREATION : QUALITY ASSURANCE

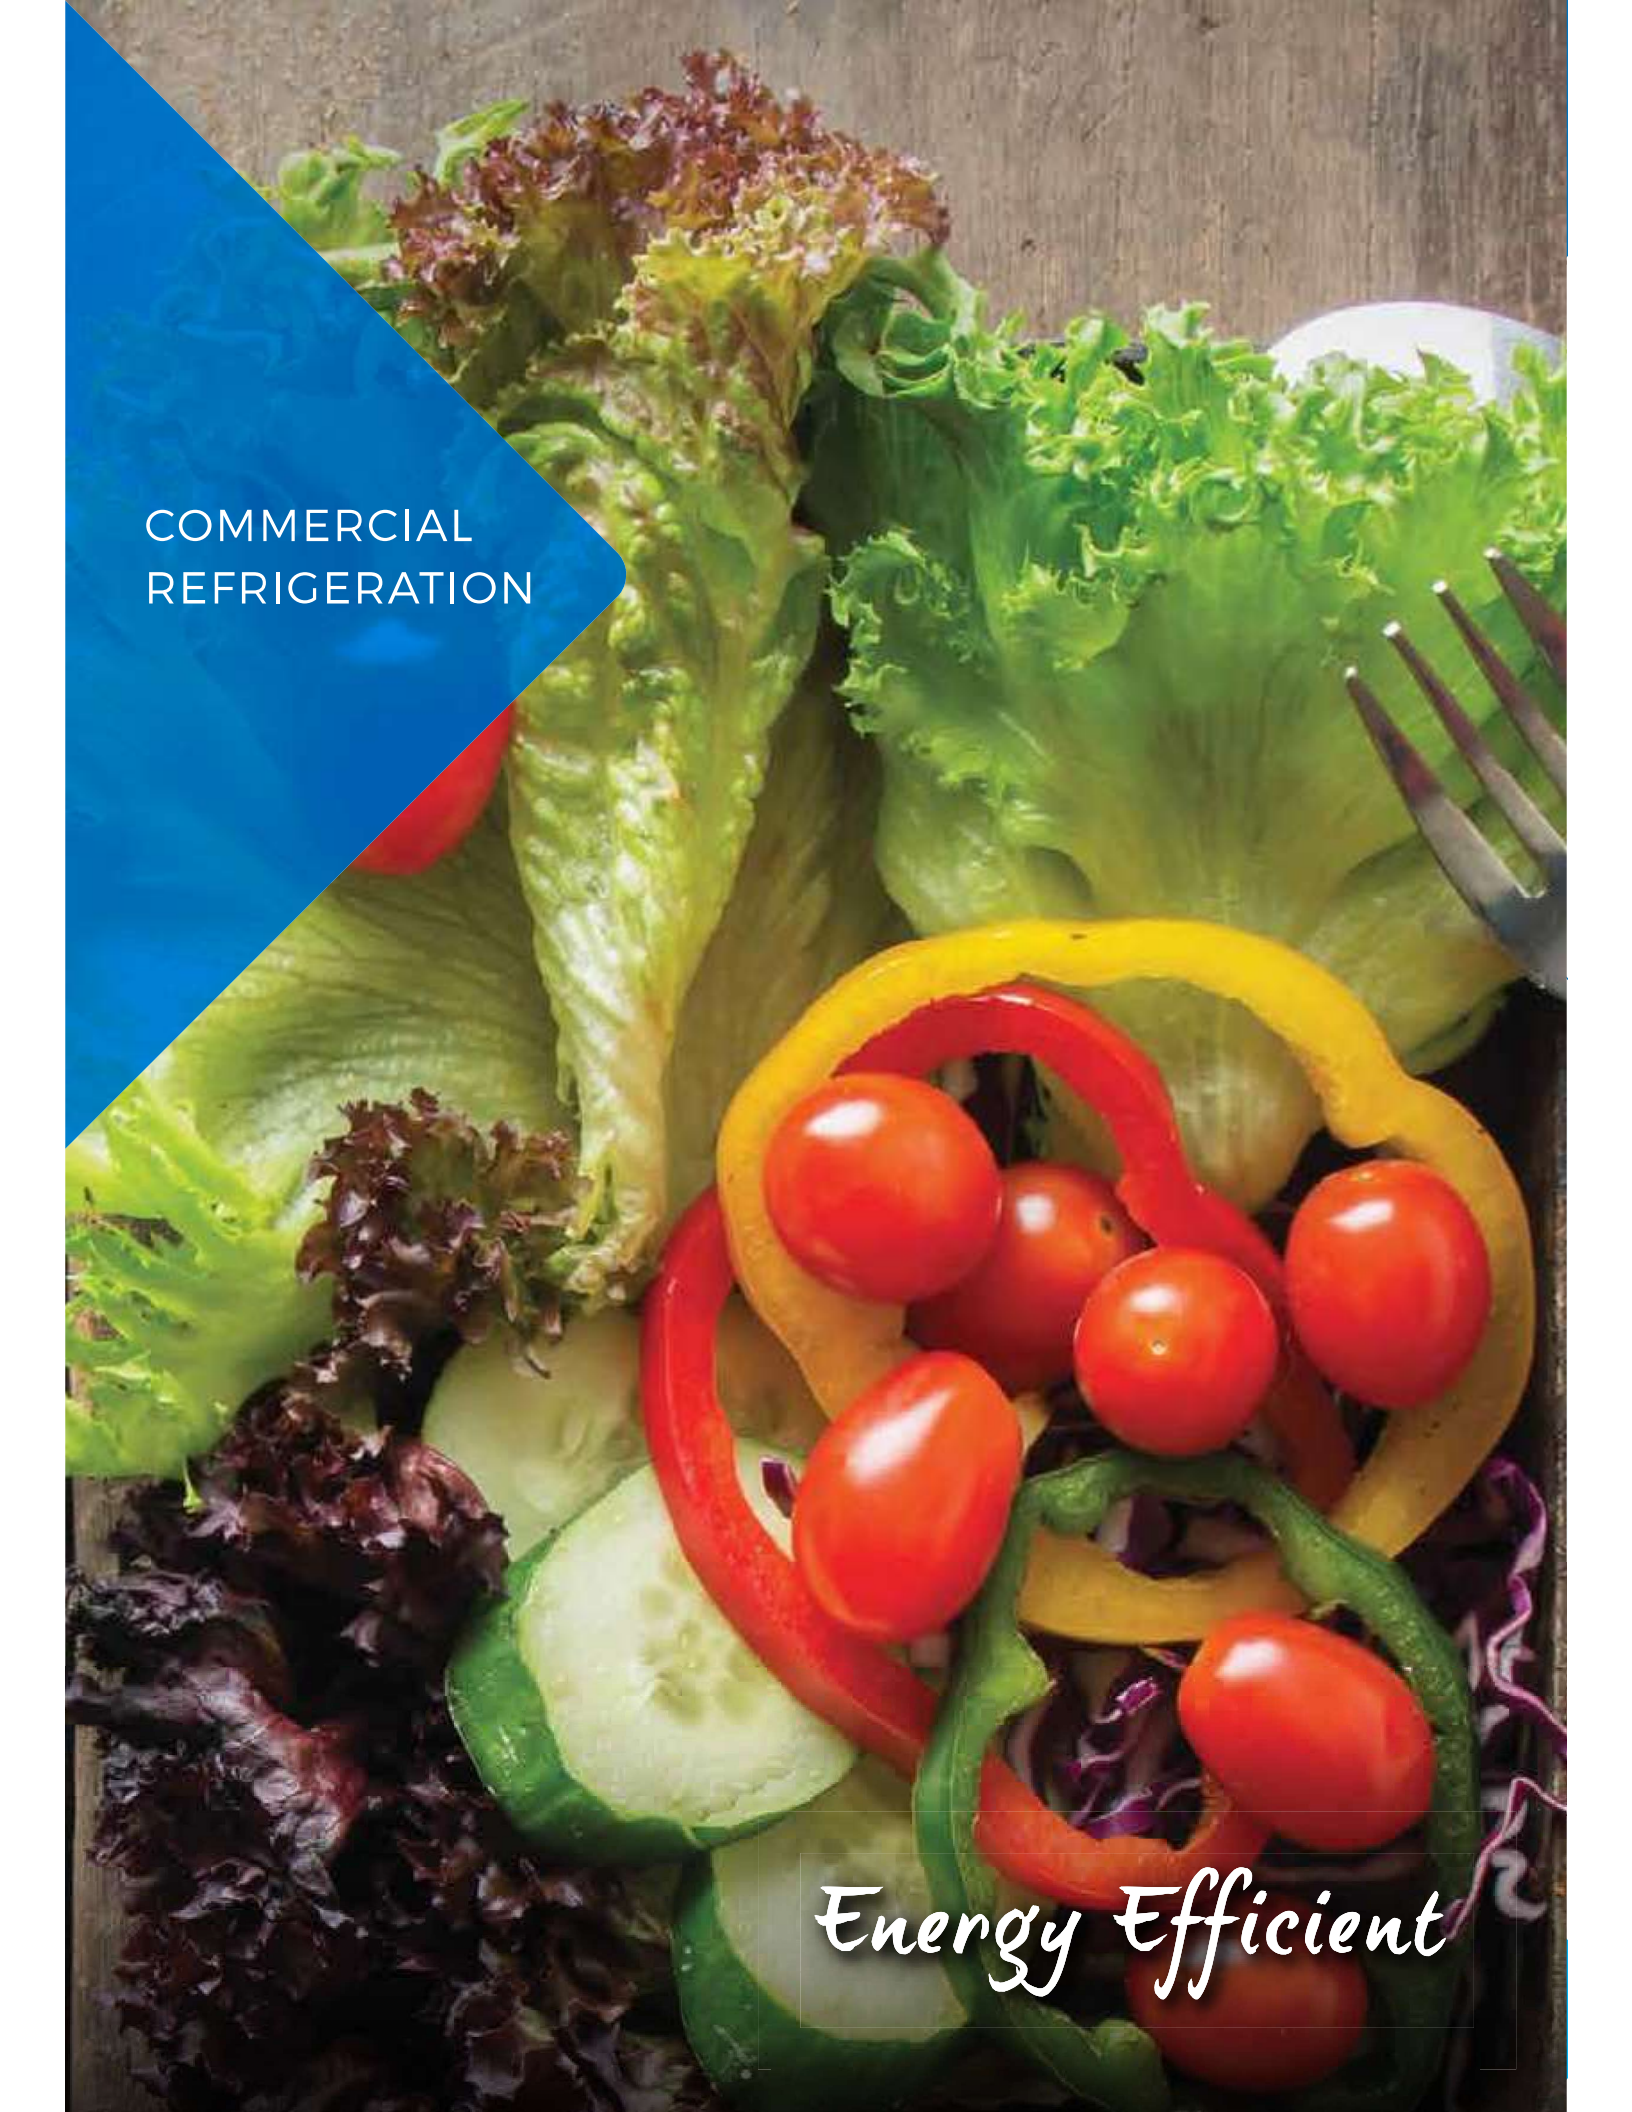
- ◆ High-quality austenitic stainless steel
- ◆ Adjustable PVC coated steel shelves
- ◆ Solid magnetic gaskets for a tight seal
- ◆ Environment safe HCFC refrigerant
- ◆ Optimum size for space constraint kitchen
- ◆ Complies to global safety standards & regulation

ENERGY SAVING SYSTEM : ONE-TIME INVESTMENT

- ◆ Effective defrost system
- ◆ Excellent cooling performance that guarantees cost saving with long term usage
- ◆ HI-Low Temperature and Defrost alarm
- ◆ Easy plug-in of 13 Amp power supply (240V/50Hz/1 phase)
- ◆ High density PU for the perfect insulation

ASSURANCE : HYGIENE AND SAFETY

- ◆ Complies with global sanitary & food grade standards
- ◆ Ensure food freshness and avoid contamination

A close-up photograph of a fresh salad on a rustic wooden surface. The salad includes various types of lettuce (green and red), sliced cucumbers, cherry tomatoes, and rings of yellow and red bell peppers. A silver fork is visible on the right side. A blue diagonal graphic element is on the left side of the image.

COMMERCIAL
REFRIGERATION

Energy Efficient



REFRIGERATION

UPRIGHT SOLID DOOR

NEW! Pass Through Upright Refrigerator



1260 x 800 x 1830 width | depth | height (mm)

MLP-1043R

Weight	180kg
Capacity	1045L
Temp Range	-3°C to +7°C
No of Shelves	8
Refrigerant	R-134A
Compressor (hp)	1/3
Voltage	220 - 240V / 50 & 60Hz

UPRIGHT SOLID DOOR 2-Door



MDS-520R1



MDS-520F1

640 x 800 x 1830 width | depth | height (mm)

MDS-520R1

MDS-520F1

Weight	110kg	110kg
Capacity	508L	508L
Temp Range	-3°C to +7°C	-24°C to -3°C
No of Shelves	4	4
Refrigerant	R-134A	R-134A
Compressor (hp)	1/3	1/3
Voltage	220 - 240V / 50 & 60Hz	
Rated input (A/W)	2.1 / 330	1.5 / 240

F FREEZER
C CHILLER

Self Diagnosis

S.Steel Interior/Exterior

Micom Auto.Thermostat

Auto Defrost System

◆ UPRIGHT SOLID DOOR 4-Door



MDS-1040R1

F FREEZER
C CHILLER

1260 X 800 X 1830 width | depth | height (mm)

	MDS-1040R1	MDS-1040F1	MDS-1040HRF1	MDS-1040RF1
Weight	180kg	180kg	180kg	180kg
Capacity	1045L	1045L	502L(C) + 502L(F)	782L(C) + 222L(F)
Temp Range	-3°C to +7°C	-24°C to -3°C	-24°C to -3°C -3°C to +7°C	-24°C to -3°C -3°C to +7°C
No of Shelves	8	8	8	8
Refrigerant	R-134A	R-134A	R-134A	R-134A
Voltage	220 - 240V / 50 & 60Hz			
Rated input (A/W)	1.9 / 300	2.9 / 450	3.5 / 550	3.5 / 550



MDS-1040F1



MDS-1040HRF1



MDS-1040RF1

◆ UPRIGHT SOLID DOOR 6-Door



MDS-1660R1

1900 X 800 X 1830 width | depth | height (mm)

	MDS-1660R1	MDS-1660F1	MDS-1660RF1
Weight	240kg	240kg	240kg
Capacity	1644L	1644L	492L(F) + 1107L(C)
Temp Range	-3°C to +7°C	-24°C to -3°C	-24°C to -3°C -3°C to +7°C
No of Shelves	12	12	12
Refrigerant	R-134A	R-134A	R-134A
Voltage	220 - 240V / 50 & 60Hz		
Rated input (A/W)	3.8 / 600	4.1 / 640	-



MDS-1660F1



MDS-1660RF1

F FREEZER
C CHILLER

Self Diagnosis

S.Steel Interior/Exterior

Micom Auto.Thermostat

Auto Defrost System