


2 Hob Portable Unit

CK235

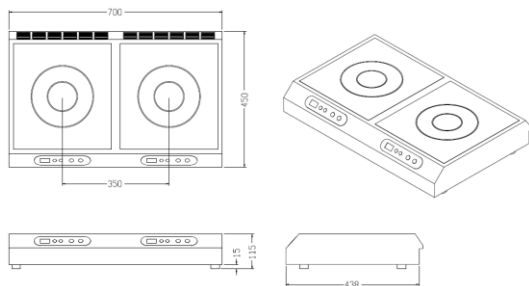

Specification

Electricity	CK235	220V, 60Hz, 1PH			Power Consumption	CK235		7000 W	
	CK235-A	208~240V, 50/60Hz, 1PH				CK235-A			
	CK235-E	220~240V, 50/60Hz, 1PH				CK235-E		6000 W	
	CK235-J	200V, 50/60Hz, 1PH				CK235-J			
Power Connection		2 separate plugs			Max Current		30 A (L:15A / R:15A)		
Conversion to Calory		6048 Kcal/h							
Warming		H1 ~ H7 (7 steps)			Heating			1 ~ 10 (10 steps)	
7 Warming Steps (H1-H7)	(H1-H7)	H1	H2	H3	H4	H5	H6	H7	(1L Water, using chafer)
		35℃	40℃	50℃	60℃	70℃	80℃	90℃	
Dimension / Weight		Product: 700 X 450 X 115 (mm) / 13kg Package: 770 X 520 X 210 (mm) / 15.5kg							
Controller Type		Capactive button (integrated into the unit)							
Cookware Diameter		min : Ø125mm max : Ø300mm			Loadable Weight			30 Kg	
Recommendation		Pasta, Egg station, Open kitchen							
Functions & Features		■ Safety							
		- No vessel : "00"							
		- Over current indication : "E1"							
		- Over voltage indication : "E2" (Above 265V)							
		- Low voltage : "E3" (Below 180V)							
		- Over heated product indication : "E4" (IGBT heat sink temperature above 85°C)							
		- Top glass overheated (empty vessel) : "E6" (Top surface temperature above 260°C)							
		- Unstable power indication: "E7"							
		- Defective PCB indication : "E8"							
Warranty		- Defective Working Coil indication : "E9"							
		1 year (to be charged in case of user's negligence)							

Seoul Office: #75, Ahasan-ro 78-gil, Gwangjin-gu, Seoul, Republic of Korea 04969 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

R&D Center: #209, Goraesan-ro, Wabu-eup, Namyangju-si, Gyeonggi-do, Republic of Korea 12202 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

DIPO INDUCTION CO., Ltd. / www.dipoele.com

COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.