AXIOM®-3 (2U/1L Warmer)

Height: 18.9" Width: 8.4" Depth: 22.1" (48.0cm) (21.3cm) (56.1cm)



Server(s) sold separately

Specifications

Product #: 38700.0004

Water Access: Plumbed

Finish: Stainless

Funnel: Black Plastic

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
220-240	8.6-9.0	1900-2100	Yes	EURO 16A	80	60°F (15.5°C)	1	2	50-60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Faucet: Upper

Warmers: Two Upper/ One Lower

Plumbing Requirements

CAD Drawings

	3 - 1-				3-	
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	1/4" Male Flare Fitting	-	•		

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 04/08/2021

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Adjusts automatically to varying water pressure


- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Cold brew lock-out and automatic warmer time-out ensure high quality, fresh tasting coffee
- Front of machine programming simplifies installation
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Energy-saver mode reduces tank temperature during idle periods
- Ensures coffee brew quality with cold brew lock out capability
- Hot water faucet
- SplashGard® funnel deflects hot liquids away from the hand
- Servers not included unless otherwise noted

Agency:

CE

Additional Features

DBC

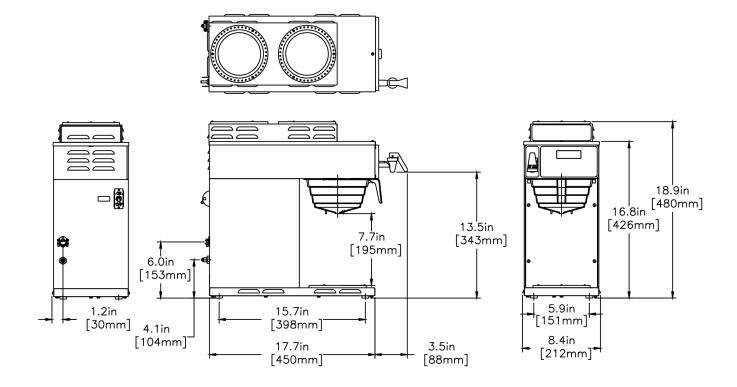

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	18.9 in.	8.4 in.	22.1 in.	23.8 in.	12.5 in.	26.5 in.	31.650 lbs	4.566 ft ³	
Metric	48.0 cm	21.3 cm	56.1 cm	60.3 cm	31.8 cm	67.4 cm	14.356 kgs	0.129 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 04/08/2021

 For most current specifications and other info visit bunn.com.
 04/08/2021

Related Products & Accessories:AXIOM®-3 (2U/1L Warmer)(38700.0004)





Serving & Holding Options: AXIOM®-3 (2U/1L Warmer)(38700.0004)

EASY POUR®,(BLK) 1/CS Product #:06100.0101	EASY POUR®,(BLK) 2/CS Product #:06100.0102	EASY POUR®,(BLK) 3/CS Product #:06100.0103	EASY POUR®,(BLK) 6/CS Product #:06100.0106	EASY POUR®,(BLK) 12/ CS Product #:06100.0112
EASY POUR®,(BLK) 24/	EASY POUR®,(ORN) 1/	EASY POUR®,(ORN) 2/	EASY POUR®,(ORN) 3/	EASY POUR®,(ORN) 24/
CS	CS	CS	CS	CS
Product #:06100.0124	Product #:06101.0101	Product #:06101.0102	Product #:06101.0103	Product #:06101.0124
DECANTER, GLASS-BLK	DECANTER,GLASS-BLK	DECANTER,GLASS-BLK	DECANTER,GLASS-ORN	DECANTER, GLASS-
12C 24/CS	12CUP 1PK	12C 3/CS	12C 24/CS	ORN 12 CUP 1PK
Product #:42400.0024	Product #:42400.0101	Product #:42400.0103	Product #:42401.0024	Product #:42401.0101



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 04/08/2021