

Upright Pass Through Display


双通双趟门高身展示柜

AUCD1200FD



- 01 节能省电 长久锁温，采用三层中空钢化玻璃保温性强。
- 02 双通展示效果好，节省空间操作使用方便，柜体内高强度层架，存放空间自由调节，方便清洁。

- 01 Energy saving, electricity saving, long-term temperature locking, three-layer hollow toughened glass, strong thermal insulation.
- 02 Save space with front & rear glass design · Durable and solid shelves can be freely adjusted for easy cleaning.

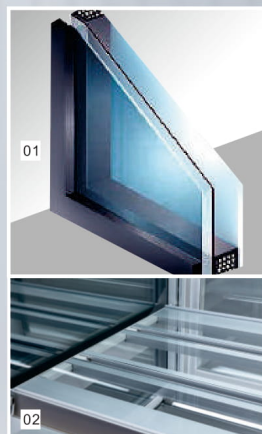

Upright Pass Through Display

双通双趟门高身展示柜

AUCD1200FD



产品优点 Product Features

1. 模块化设计，易拼装易运输。
 2. 智能控温，确保各区域温度均恒。
 3. 配合店面装修，不同颜色可自由选择。
 4. 高透视率全钢化玻璃，层架自由调节。
1. Modular design, easy assembly and transportation
 2. Intelligent temperature control to ensure constant temperature in each area
 3. With the store decoration, different colors can be freely selected
 4. High perspective, fully tempered glass, layer frame can be adjusted freely

规格参数 Specification parameters

Model No.	AUCD1200FD
Temp Range(°C)温度 (°C)	+2 ~ +8
External Dimension(mm)外尺寸 (毫米)	
Width 宽度	1260
Depth 深度	788
Height 高度	1700
Glass Case 玻璃展示部分	3.8m ²
Evaporator 蒸发器	纯铜管+铝翅片 Copper tube & aluminium fin
Condensing unit 压缩机	进口压缩机 Imported compressor
Legs 脚	可调高度60mm Adjustable up to 60 mm
Display Dimension(mm)展示部分尺寸 (毫米)	
Base底:	
Width 宽度	1150
Depth 深度	515
Mid glass shelf 层板:	
Width 宽度	1125
Depth 深度	380
Power Supply电压	220V
Power Input(amps)电源输入 (安培)	10A
Start up (amps) 启动时需输入的电 (安培)	7.5A
Running (amps) 运行时输入的电 (安培)	5A
Rating Power (watts) 功率	830W
Condensing unit(HP) 机组 (匹)	1/2
Max.pipe length work(m) 最长电线长度 (米)	2.5m
Refrigerant 制冷剂	R134a
Package Size 包装尺寸	1410*938*1900mm