


Mod. **ZO602SP**

RF42TLXEEIL312GC1A

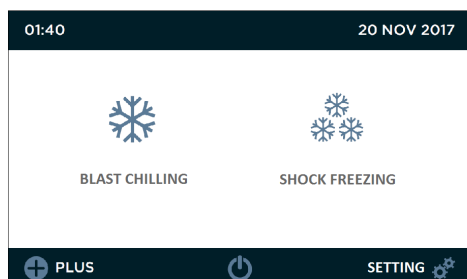

FUNCTIONS:

Blast Chilling

Shock Freezing

GENERAL FEATURES:

Panel construction

Stainless steel exterior (Scotch-Brite satin)

Inner in stainless steel with rounded corners

Inside bottom and floor die-formed leakproof

Insulation in high density (42 kg/m³ approx.) expanded polyurethane, 80 mm thick, HCFC-free

Copper-aluminum evaporator with cataphoresis anti-corrosion treatment

High-ventilation evaporator to ensure the highest efficiency of the cooling system

Anti-condensation resistance, placed on the door under the gasket

Hinged door with gasket and closing ramp system

Vertical ergonomic door handle with magnetic closure

Access ramp with liquid collection grid and filtering system (optional)

INTERNAL SETUP:

Thick stainless steel internal bumper to avoid damage caused by the trolley

External stainless steel protection to protect the control-board

Heated core probe, with 4 measuring points

Pre-cooling function

PLUS functions

Customised blast chilling and blast freezing cycles (300 cycles can be memorised)

Automatic storing at end of blast chilling

Indirect blowing electronic fans, efficient but gentle on food

COOLING SYSTEM:

Remote condensing unit with high power, with protection cover

Predisposition for R452A refrigerant fluid

CONTROLS AND SAFETY DEVICES:

7" high-definition IPS capacitive TOUCH display, easy to use

Processes identifiable through photos

USB connection for uploading and downloading data and recipes

Circuit breaker for compressor protection

Electrical connections positioned frontally in the panel equipped with safety locks

VERSIONS / ACCESSORIES (OPTIONALS):

Predisposition for other gas variants

Mod. ZO602SP

RF42TLXEEIL312GC1A

MODELLO:		ZO602SP
NET WIDTH	mm	1500
NET DEPTH	mm	3825
NET HEIGHT	mm	2200
NET WEIGHT	Kg	1446.02
PACKED WIDTH	mm	2400
PACKED DEPTH	mm	3 x 1760
PACKED HEIGHT	mm	1740
PACKED WEIGHT	Kg	1573.02
PACKED VOLUME	m³	14.7
NET HEIGHT DOOR	mm	1820
DOOR OPENING WIDTH	mm	900
INNER DEPTH	mm	3340
NET HEIGHT DOOR 2	mm	1820
DOOR OPENING WIDTH 2	mm	900
INSULATION THICKNESS	mm	80
FLOOR HEIGHT	mm	60
N° OF COMPARTMENTS	n°	1
N° OF DOORS	n°	2
INTERNAL SETUP		Bumpers
POWER SUPPLY		400V-3N+PE 50Hz
LOADING CAPACITY n° TRAYS GN	n°	6 TROLLEYS GN1/1
LOADING CAPACITY n° TRAYS EN	n°	6 TROLLEYS EN1
CHILLING CAPACITY	Kg	450
FREEZING CAPACITY	Kg	300
REFRIGERANT	gas	R452A
NOMINAL CURRENT	A	9,54
ABSORBED ELECTRICAL POWER	W	2085
COOLING POWER	W	26840
NOIS LEVEL	dB(A)	-
CLIMATE CLASS		5
TEMPERATURE 2	°C	-18
TEMPERATURE	°C	3
YIELD PER CYCLE (+65/+10°C) Kg	[EN17032]	390
YIELD PER CYCLE (+65/-18°C) Kg	[EN17032]	240
UMC (optional)		UMC005

(*) For mod. BC___Evap. Temperature -10°C - Cond. temperature +40°C

(*) For mod. BF___Evap. temperature -25°C - Cond. Temperature +40°C

Mod. **ZO602SP**

RF42TLXEEIL312GC1A

