



Installation, Operation and Care Manual




SCAN ME
TO GO TO
WARRANTY
REGISTRATION

MANUFACTURING
SINCE 1966

4-INS-DHC1900

THE CHEFS COMPANION

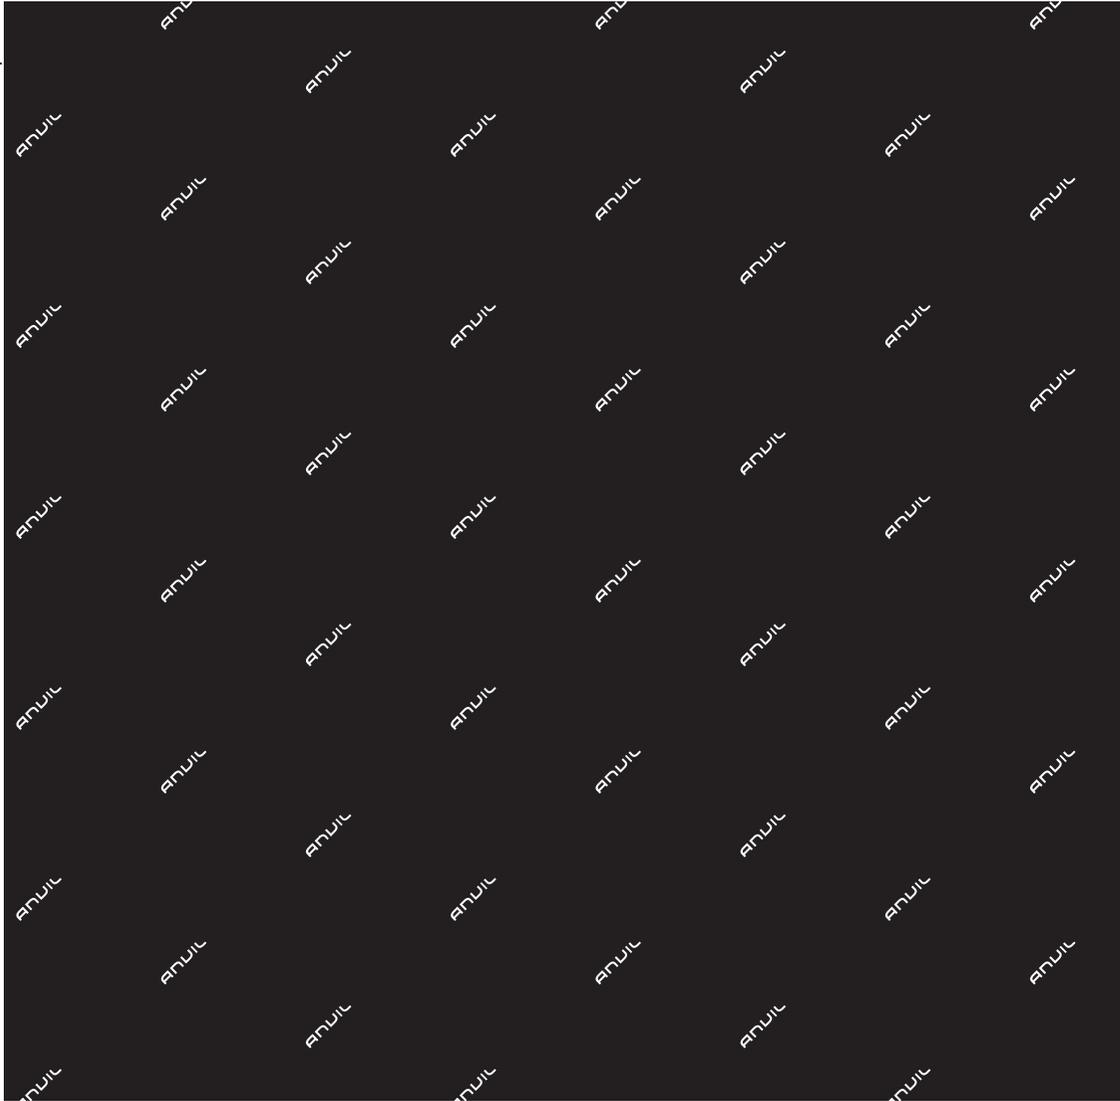

THE CHEFS COMPANION



THANK YOU FOR PURCHASING
AN ANVIL PRODUCT!



REGISTER ONLINE TODAY

Register your warranty on-line at www.anvilworld.com today and learn how to get the best out of your Anvil product, tips to care for your Anvil product for long lasting performance, exciting recipes and more.

NO WEB ACCESS?

If you do not have access to the Web, register by completing this form and faxing it to the Anvil head office in South Africa. Fax: +27 11 474 1630

ONLY COMPLETE IF YOU DO NOT HAVE WEB ACCESS

Company _____

Name _____

Surname _____

Telephone _____

Cellphone _____

Email Address _____

Country _____

Postal address _____

Anvil products purchased _____

Code (see box label) _____

Serial number (see back of machine) _____

INTENDED USE

- Full-Service restaurant
- Coffee Shop / Deli
- Fast Food Outlet
- Hotel
- Bed & Breakfast
- School Cafeteria

- Institutional Cafeteria
- Corporate Catering
- Private Use
- Franchisor
- Convenience Store
- Other

 ALL ANVIL EQUIPMENT COMES WITH A TWO YEAR WARRANTY ON COMPONENTS AND DEFECTIVE WORKMANSHIP.


www.anvilworld.com

LIMITED WARRANTY

All equipment which is sold under ANVIL trademark and used for commercial purposes is warranted against defects in materials and workmanship. The warranty runs for two years from the date of original installation and is for the benefit of the original purchaser only. All other Warranties ,expressed or implied , statutory or otherwise, including without limitations any implied Warranty of Merchantability or fitness for purpose are excluded .The Seller shall in no event be liable for direct,indirect or consequential damages in connection with ANVIL commercial products.

The Sellers obligation under this Warranty is limited to the repair of defects without charge. Defective units must be taken or shipped,transportation charges prepaid,to ANVIL.

This Warranty is not effective if damage occurs because of accident,carelessness,improper installation,lack of proper set-up,supervision when required or if the equipment is installed or operated in any manner contrary to the installation and operating instructions. In these cases,repairs will be made at a reasonable cost. Work performed by unauthorized personnel or unauthorized service agencies using non Anvil spares voids this Warranty.

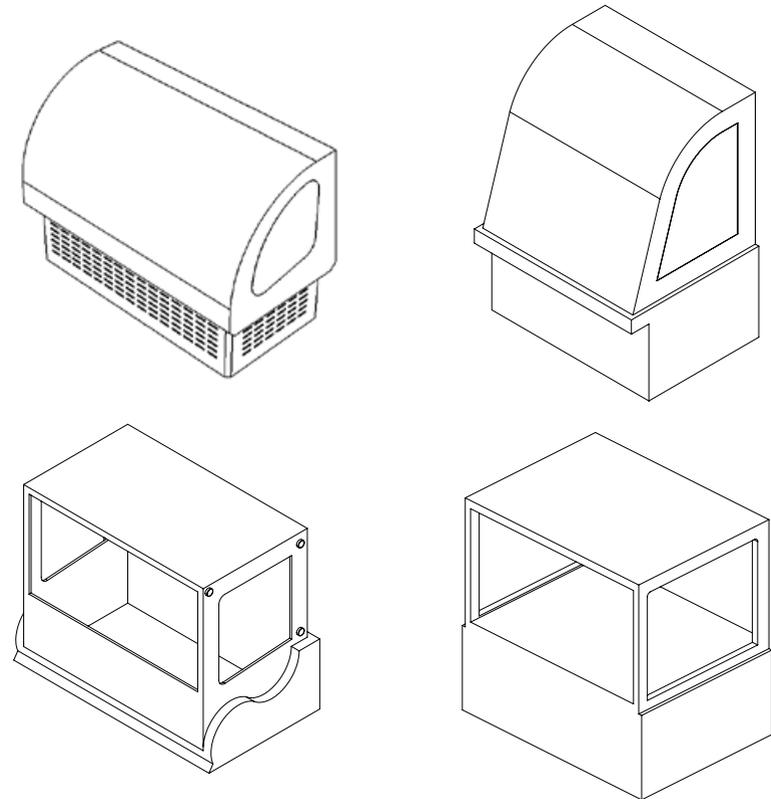

NB:

REGISTER ON-LINE TODAY

Register your warranty on-line now at www.anvilworld.com

NO WEB ACCESS

If you do not have access to the Web. Kindly register by completing the warranty registration form and fax it to the ANVIL office in the country of purchase.

Failure to do so will invalidate your warranty.

INSTALLATION OPERATION AND CARE OF HEATED DISPLAY CABINETS

**MODEL: DHC0900,DHC1200,DHC1500
DHC1900,DHC2200,DHC2500
DHC4900,DHC4200,DHC4500
DHC7900,DHC7200,DHC7500**

UNPACKING

Unpack the product and check for any damage incurred during transit. This should be reported to the responsible carrier, railway or postal authority, and a request for a damage report should be made.



THESE INSTRUCTIONS MUST BE FOLLOWED FOR US TO GUARANTEE OUR FULL SUPPORT OF YOUR CLAIM FOR PROTECTING AGAINST LOSS FROM CONCEALED DAMAGE. THE FORM FOR FILING SUCH A CLAIM WILL BE PROVIDED BY THE CARRIER.

GENERAL INSTALLATION AND OPERATION INSTRUCTIONS:


The Anvil Heated Display cabinets are designed for illuminated display of food products at temperatures between +40° + 75° C. The heated system ensures that the products placed inside can be stored at the correct temperature.

1. Assemble the shelving system and rear doors.
2. Remove all the protective film from exposed stainless steel parts and surfaces.
3. The units are designed for food display. Clean carefully before using by following the specific cleaning instructions detailed later in this manual.
4. Plug the unit into a suitable power source as detailed later in this manual.
5. The unit is provided with a digital control panel for switching on and off as well as temperature setting. See the operating instruction on page 2 for details.
6. The interior lights can be operated by using the lighting button located below the digital control.
7. The DHC9000/1500 units can be either placed on a suitable work surface or can be fitted into a Countertop.
8. If the units are to be fitted into a Countertop please ensure that the cut out details are observed. It is essential that good ventilation is maintained by ensuring that the cut out details are STRICTLY adhered to.

NOTES

NOTES

WORKTOP CUT OUT

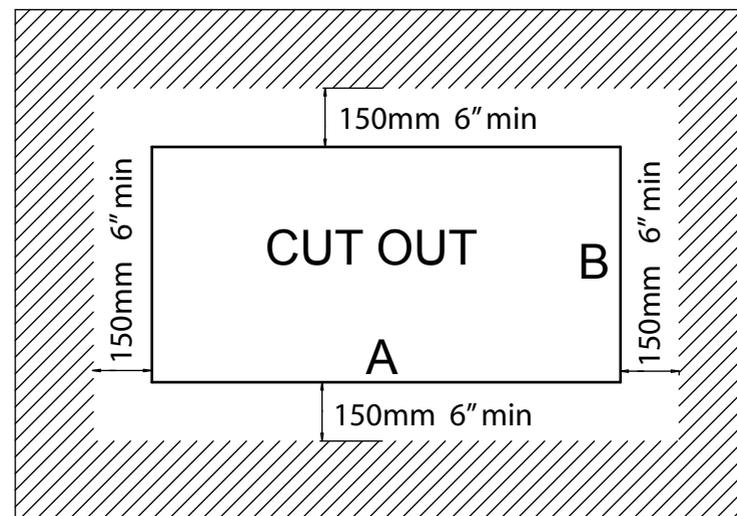


MODEL	A	B
DHC0900	850	430
DHC1200	1150	430
DHC1500	1450	430

IT IS ESSENTIAL THAT THE CABINET BELOW THE CUT OUT IS WELL VENTILLATED.
 POOR VENTILLATION WILL EFFECT THE PERFORMANCE OF THE UNIT

SPECIFIC OPERATING INSTRUCTIONS

The following are the specific operating instructions to set the temperature controller. It is advisable not to reset the controller frequently.

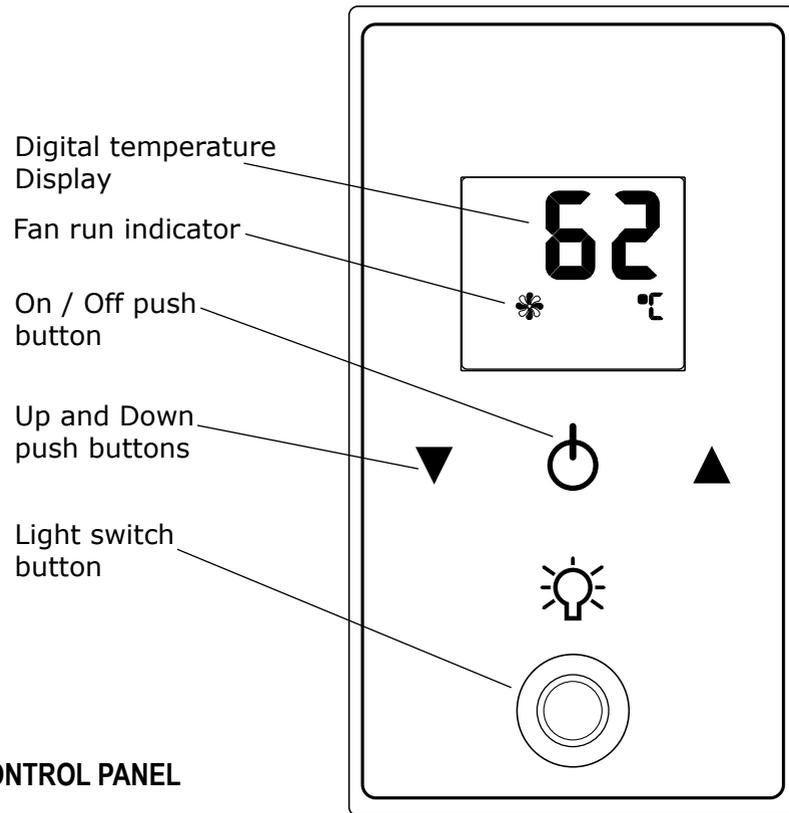

CONTROL PANEL

1. Press the  button for 3 seconds to switch on the controller.
2. To set the temperature, press  for 1 second. The numerals will flash on the display. Adjust the temperature value up or down using the arrow buttons, the value will be stored automatically after 6 seconds.
3. The factory default setting is 65°C.
4. The lights may be switched on or off by the touch sensitive switch marked .
5. To switch off the unit, press and hold the  button for 3 seconds.



WARNING

Electric Shock Hazard.

Keep water and other liquids from entering the inside of the equipment. Liquid inside the equipment could cause an electrical shock

Do not spray water or cleaning products. Liquid could contact the electrical components and cause a short circuit or an electrical shock. Do not use equipment if power cord is damaged or has been modified

SAFETY

READ ALL INSTRUCTIONS BEFORE USE. FAILURE TO FOLLOW THESE PRECAUTIONS COULD RESULT IN INJURY TO YOURSELF AND OTHERS

1. The units are designed to operate on alternating current only (A.C.). DO NOT CONNECT TO DIRECT CURRENT (D.C.).
2. Ensure that the power supply cord does not come into contact with hot surfaces.
3. If the supply cord is damaged, it must be replaced with a new cord assembly available from the suppliers agent.
4. Do not use the unit in a dusty environment or in an explosive atmosphere.
5. This unit is designed for indoor use only
6. BASIC SAFETY RULES
 - a. Do not touch the unit when hands and feet are wet
 - b. Do not use the unit when bare foot
 - c. The unit should never be used by children or untrained personnel
 - d. Do not pull on the electrical cord when unplugging the machine.



WARNING

Burn Hazard.

Do not touch hot food, liquid or heating surfaces while equipment is heating or operating

Hot surfaces and food can burn skin. Allow the hot surfaces to cool before handling


CLEANING

- 1) It is advisable to clean the interior of the machine as often as possible to maintain good hygiene standards.
- 2) Always ensure that the unit is disconnected from the main power supply before cleaning.
- 3) Do not use abrasive powders or solvents to clean this unit.
- 4) The unit should be cleaned with warm soapy water. Use only a damp cloth.
- 5) Dry the unit carefully with a cloth before turning back on.

THE UNIT SHOULD NEVER BE CLEANED USING A WATER JET OR SIMILAR PRESSURE CLEANING DEVICE.

DESCRIPTION OF MODELS





MODEL	DESCRIPTION	CAPACITY	VOLTAGE (V/Hz)	POWER (WATTS)
DHC0900	HEATED DISPLAY 900MM	70L	230/50	765
DHC2200	HEATED DISPLAY 1200MM	94L	230/50	805
DHC2500	HEATED DISPLAY 900MM	118L	230/50	845
DHC1900	HEATED DISPLAY 900MM	225L	230/50	933
DHC2200	HEATED DISPLAY 1200MM	310L	230/50	1080
DHC2500	HEATED DISPLAY 1500MM	395L	230/50	1337
DHC4900	HEATED DISPLAY 900MM	140L	230/50	765
DHC4200	HEATED DISPLAY 1200MM	190L	230/50	805
DHC4500	HEATED DISPLAY 1500MM	240L	230/50	845
DHC7900	HEATED DISPLAY 900MM	285L	230/50	926
DHC7200	HEATED DISPLAY 1200MM	390L	230/50	1096
DHC7500	HEATED DISPLAY 1500MM	500L	230/50	1223

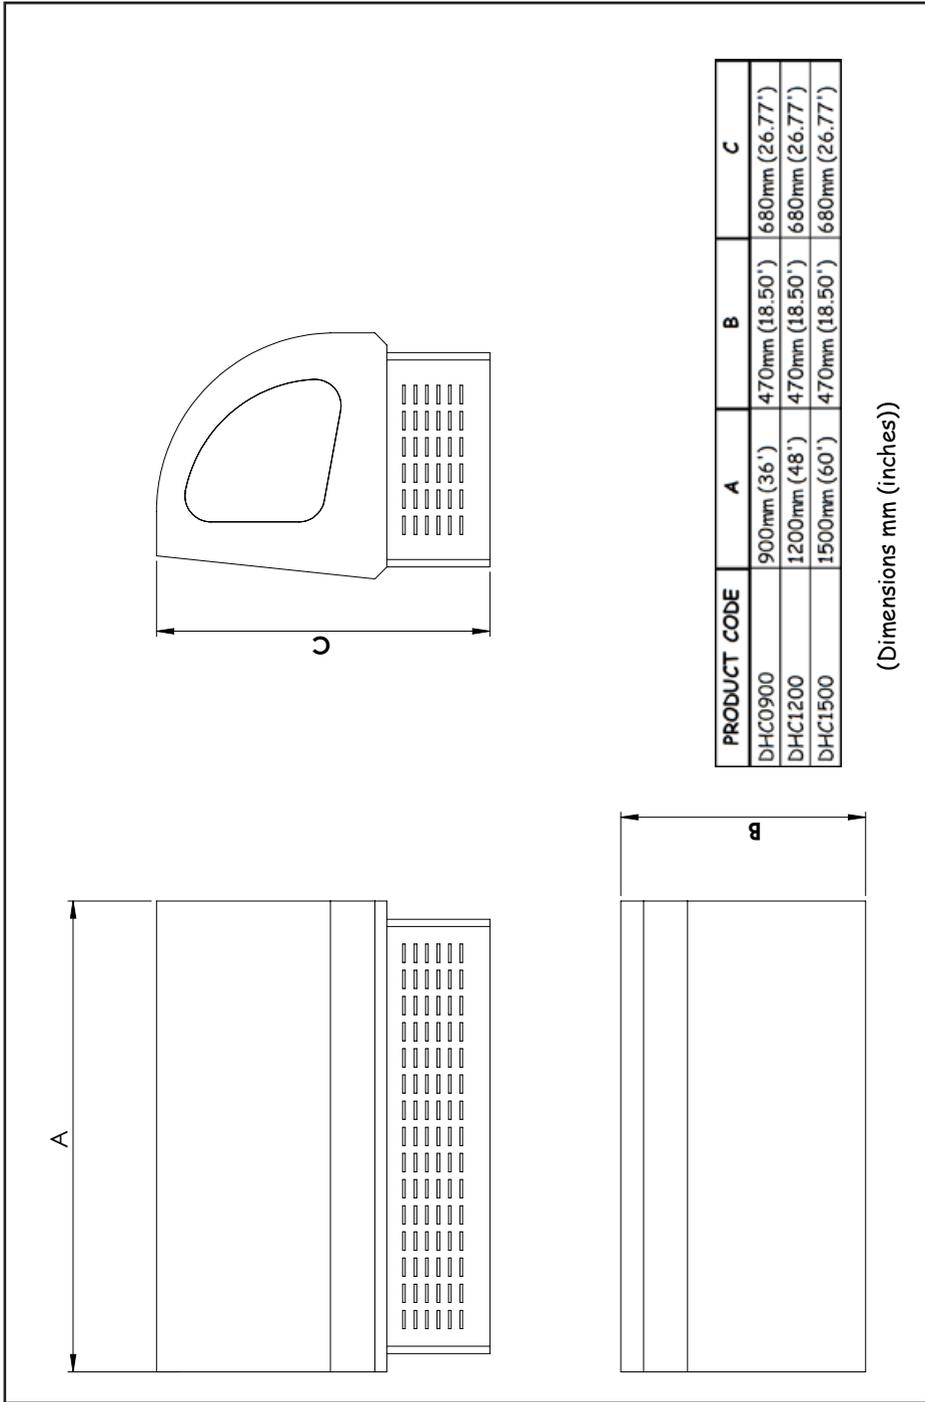

**WIRING DIAGRAM LEGEND
DISPLAY UNITS HEATED**




LEGEND	DESCRIPTION
SH1	ON/OFF LIGHT SWITCH
Mn	CIRCULATION FAN
M3	CIRCULATION FAN
EL	INTERIOR LIGHT
EE1 -3	ELEMENT 300W 230V
RK323	TEMPERATURE CONTROLLER
RT1	TEMPERATURE SENSOR
T2	TRANSFORMER 230V TO 12V LIGHTS
ft	OVER TEMP FUSE 90°C
MB	CONTROL PANEL

**WIRING DIAGRAM
DISPLAY UNITS HEATED**

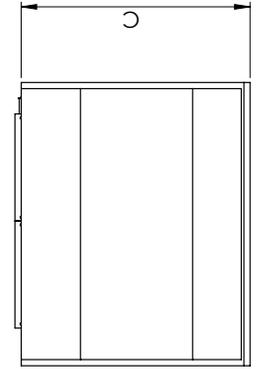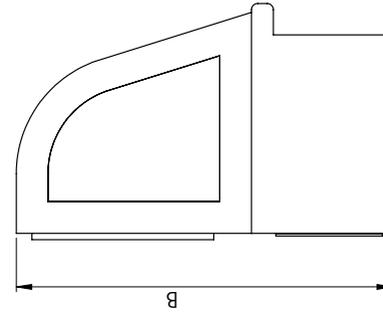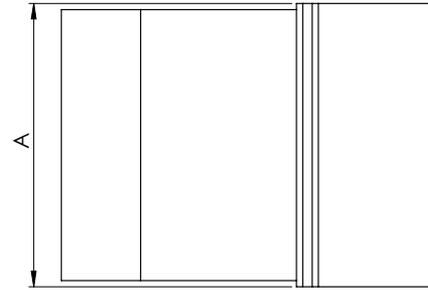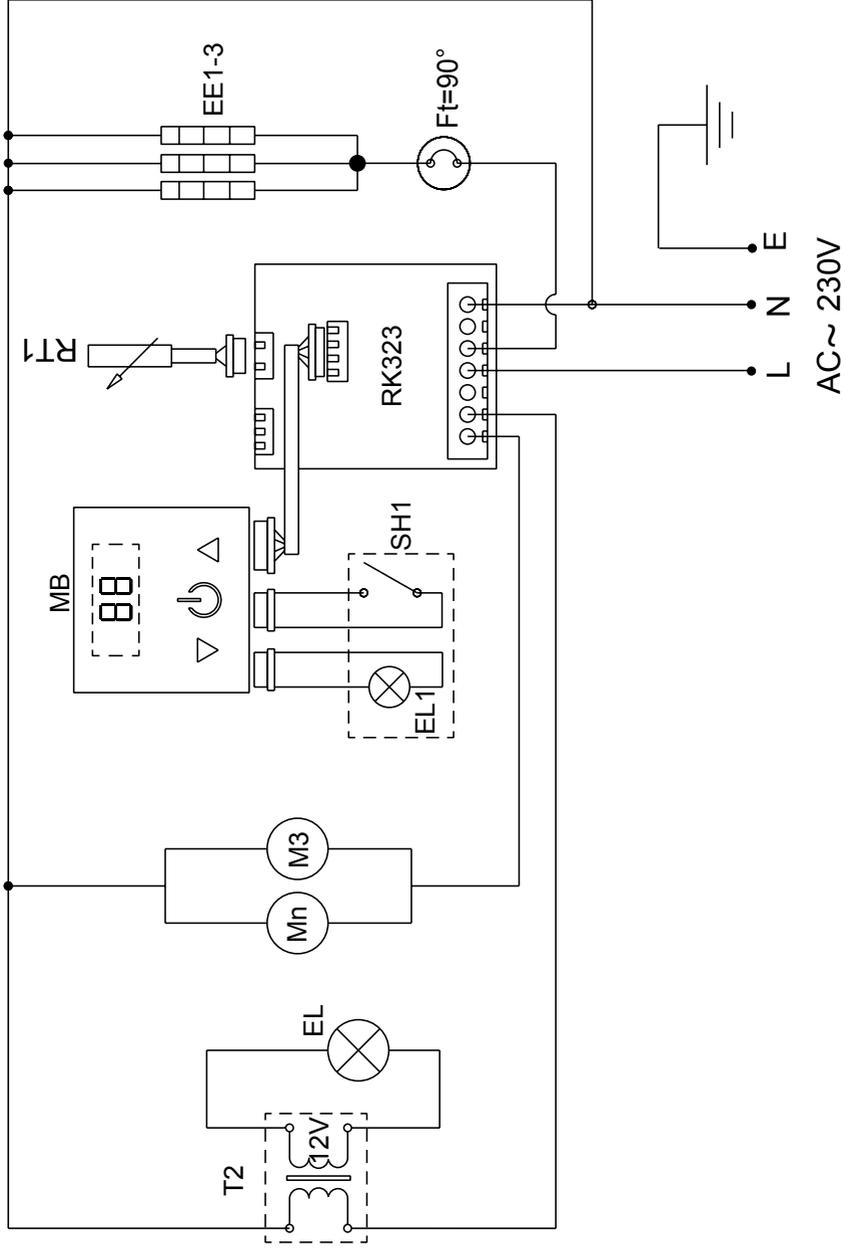




PRODUCT CODE	A	B	C
DHC1900	900mm (36")	1200 (21,26")	730 (31.10")
DHC2200	1200mm (48")	1200 (21,26")	730 (31.10")
DHC2500	1500mm (60")	1200 (21,26")	730 (31.10")

Dimensions mm (inches)

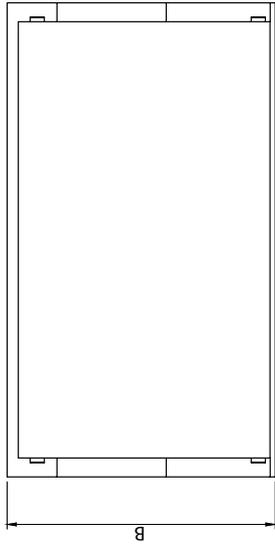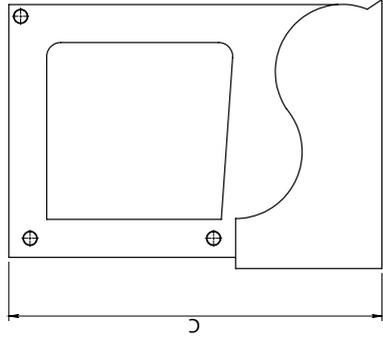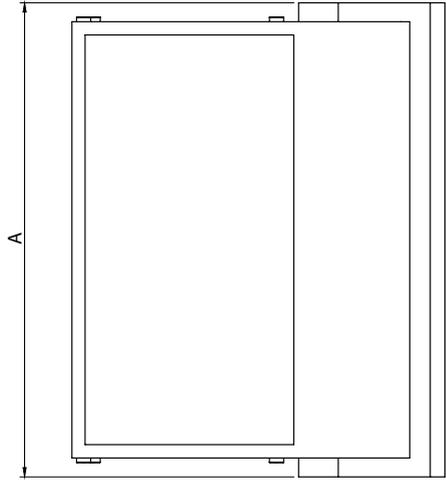

PRODUCT CODE	A	B	C
DHC4900	900mm (36")	540 (21.26")	790 (31.10")
DHC4200	1200mm (48")	540 (21.26")	790 (31.10")
DHC4500	1500mm (60")	540 (21.26")	790 (31.10")

Dimensions mm (inches)

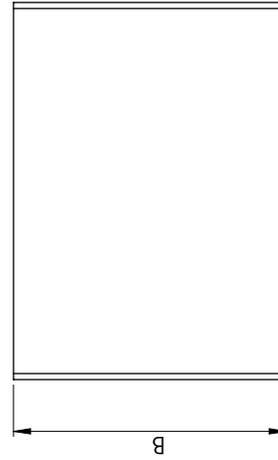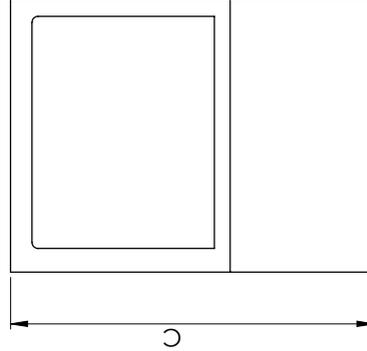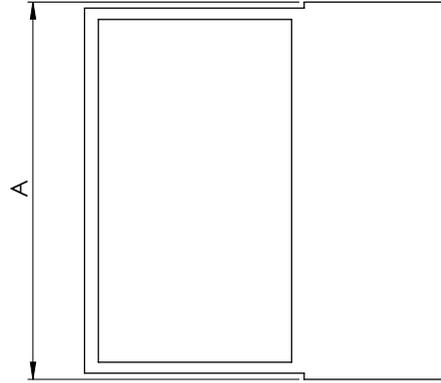

PRODUCT CODE	A	B	C
DHC7900	900mm (36")	680 (26.77")	1200 (47.24")
DHC7200	1200mm (48")	680 (26.77")	1200 (47.24")
DHC7500	1500mm (60")	680 (26.77")	1200 (47.24")

Dimensions mm (inches)