



## Ovens

### ADVANCE PLUS ovens

## ADVANCE PLUS OVEN, APE-061

19010970

<u>DIMENSIONS</u>		Article	Packed
Length	mm	<b>898,00</b>	<b>1.100,00</b>
Depth	mm	<b>867,00</b>	<b>1.000,00</b>
Height	mm	<b>846,00</b>	<b>1.000,00</b>
Weigth	Kg	<b>141,00</b>	<b>182,00</b>
Volumen	m3	<b>0,66</b>	<b>1,10</b>

<u>ELECTRICITY</u>		
Electric power	KW	<b>10,20</b>
230V - I+N		
230V - III		<b>3x4+T - 32 A</b>
400V - III+N		<b>4x2,5+T - 20A</b>

<u>PLUMBING - WATER</u>		
Water consumption (lit/h)		<b>22,00</b>
Pressure (Kg/cm2)		<b>2 - 4</b>

**GAS**  
Not used

**STEAM** Not used

**AIR** Not used

<u>LEVEL SOUND</u>	(dB)	<b>62,00</b>
--------------------	------	--------------

ADVANCE PLUS OVEN, APE-061  
Innovative technology in the kitchen :

- Professional quality
- Precision, excellence and perfect results
- Save time and money

Capacity for 6 1/1-GN trays.

"Touch control" screen.

4 cooking methods: Steam, Adjustable Steam (Humidity control during cooking), Regeneration and Convection (up to 300°C).

Preheating option.

Fagor Easy cooking mode.

Fagor Cooking, range of cooking programmes.

Fagor Multi-Tray System, control cooking by tray.

Delayed programming for: Cooking, Low-temperature cooking and Washing.

Memory function: records the different cooking methods used.

3 Speeds - 2 power ranges.

Cold-Down chamber cooling system.

"Auto-reverse" system to reverse fan rotation.

5 wash programmes.

Multisensor temperature probe.

PC management software: History, recipes. HACCP, manuals...

HACCP cooking data recording system.

Steam generator equipped with limescale detector.

Steam generator automatically empties every 24 hours of cooking.

Semi-automatic limescale removal system.

Error detection system.

"Repair service" mode system.

Quick door-closing system.

IPX-5 protection.

Retractable shower.

Power: 10.2 kW.

Dimensions: 898 x 867 x 846 mm.


Accessories in option:


- Support SH-061

- Neutral support-cabinet ANH or hot cabinet ACH


- GN trays, grids, moulds...

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	742	620	110		
COLD WATER	825	481	110	3/4"	
SOFT COLD WATER	825	556	110	3/4"	
DRAIN	467	202	110	30x25	




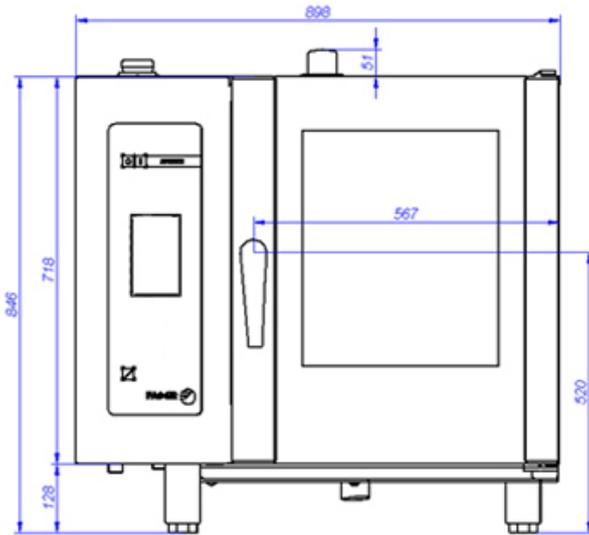

**APE-061**

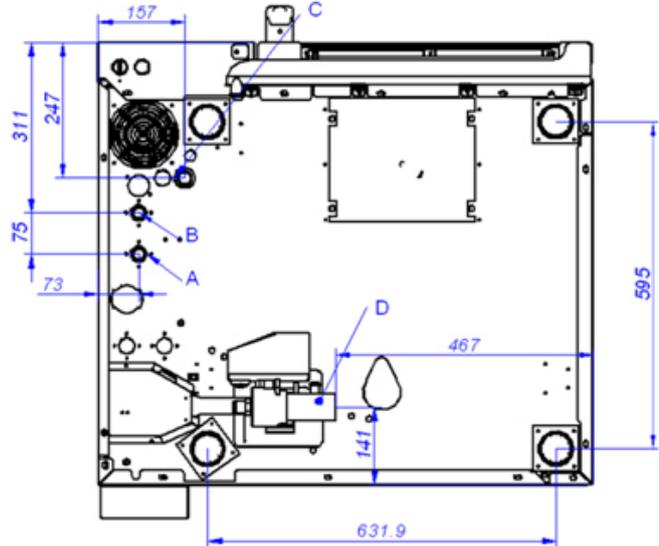

VISTA DE LA BASE DESDE LA PARTE INFERIOR  
VIEW FROM THE BOTTOM OF THE MACHINE

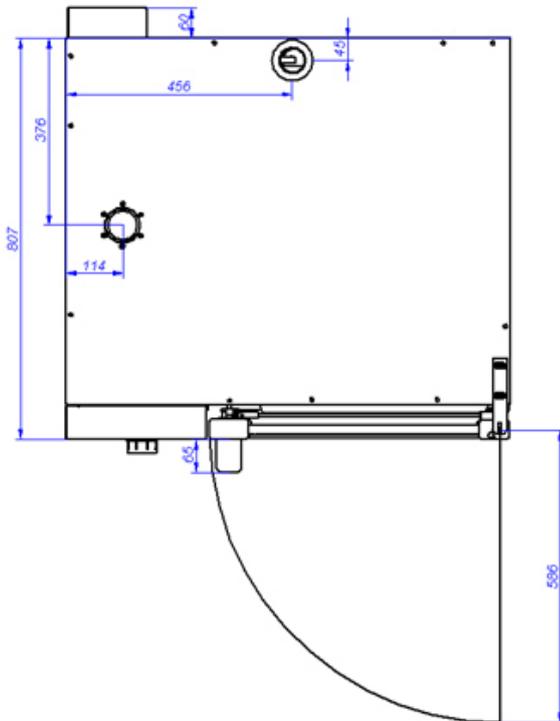

- A: Entrada de agua blanda
- B: Entrada de agua dura
- D: Desagüe

C: Alimentación eléctrica

- A: Soft water inlet
- B: Water inlet
- D: Drain

C: Electrical connection