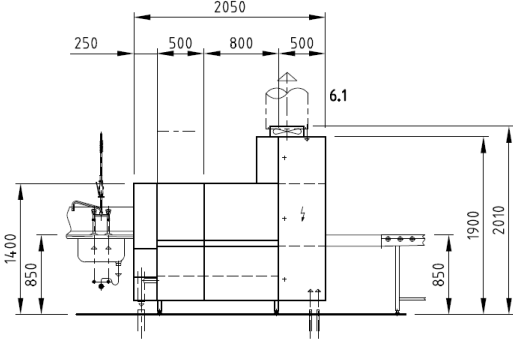
	<p><u>Manufacturer</u></p> <p>MEIKO</p>
	<p><u>Model no.</u></p> <p>MMF K 260 M</p>
	<p><u>Product Description</u></p> <p>K-Tronic 2-Tank Rack Conveyor Dishwasher</p>
	<p><u>Origin</u></p> <p>Zhongshan, China</p>
SPECIFICATIONS	
<p>Function</p>	<p>Two tank rack conveyor dishwashers with Pre-wash Zone & Main Wash Zone and Final Rise zone</p> <p>The function of the dishwasher is to provide the mechanical action necessary to distribute and direct the detergent solution and rinse waters over, under and around the dishes to loosen and remove soil. The dishwasher must also remove soil-laden waters from the machine and provide drying of dishes after the cleaning process has been completed. This should be done with the lowest consumption of fresh water, energy, and chemical products.</p>
<p>Form</p>	<p>Dimension : L 2050mm x D 830mm x H 2010mmH Entry height : 450mm Entry Width : 510mm Rack Size : 500 x 500mm</p>
<p>Construction</p>	<ul style="list-style-type: none"> - Heavy-duty stainless-steel construction with double insulated walls, 4 door springs per door with counterbalance and security switch - Tandem filter system to remove fine food particle from wash water. - V-tank with rounded edges for easier cleaning - Heavy gauge stainless steel pump impeller and housing - Energy management concept with low energy management - Electronic control system with temperature display.
<p>Engineering / MEP Ratings</p>	<ul style="list-style-type: none"> - Voltage 400V/3NPE/50Hz - Connecting Load 47.9 kW - Nominal Current 72.6 A - Final rinse water consumption: 400 l/h - Water inlet connection: DN 20 - Combined single Drainage point connection: DN 70 - Water supply 12-24 °C

Capacity	165/250 basket per hour
Sanitation	<p>Entirely corresponds to the regulations of DIN SPEC 10534 for industrial dishwashing with multi-tank transport dish washing machines.</p> <p>Pre-wash section 40°C – 50°C Main wash section(s) 55°C – 65°C Final rinse section 80°C – 85°C</p>
Accessories	<ul style="list-style-type: none"> - 1 x Universal pegged rack - 1 x Universal rack (for small items & cutlery) - CSSplus-system - Emergency-off switch - Double wall insulation - Table end switch - Heat recovery - Drying zone (Optional) - Thermolabel (Optional)
Safety	<ul style="list-style-type: none"> - CE (European Standard) - DIN SPEC 10534
Special Requirement	<ul style="list-style-type: none"> - Water Hardness max. 3°dh or approx. 50 ppm