

RD-GD SERIES

Table top Gas Griddle

PARAMETERS SHEET

MODEL#: RD-GD-SERIES



RD-GD-24

Specifications

- Full Stainless steel body
- Plug-in High-power Stainless Steel burners
- Gas Valves are certificated by CSA
- Manual ignition with Pilot switch for each burner
- With Low Back Slash and exhaust hood
- 18mm high-carbon steel griddle plate, Fully fine edge welding by Robot-Arm and RD-GD-48 griddle plate thickness is 20mm

Choose GAS TYPE When Placing Order

- LPG
Liquefied Propane Gas
- Natural Gas


Models in RD-GD series

- RD-GD-24 Gas Griddle
- RD-GD-36 Gas Griddle
- RD-GD-48 Gas Griddle



Accessories for Standard

- Adjustable bullet leg
- Convert kit of LP and Natural Gas



PRODUCT DIMENSION CHART





RD-GD-24

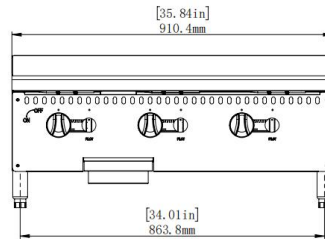

RD-GD-36

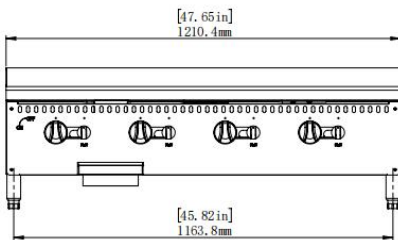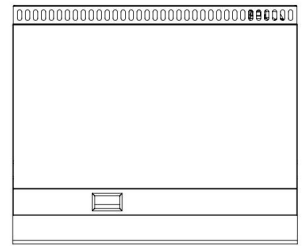

RD-GD-48

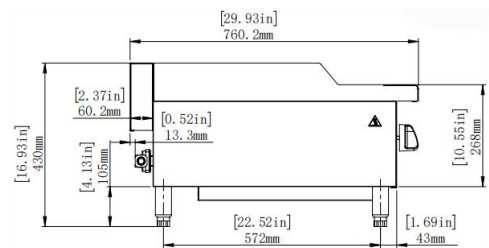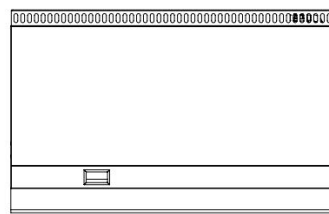

Side View

Key Parameters

| Model | Product Dimension | Heat Power | Heating Burner | Gas Consumption: | Gas inlet Connection | N.W | G.W | Packing dimension |
|----------|--|---------------|----------------|------------------------------|----------------------|-------|--------|-------------------|
| RD-GD-24 | 24.03"x29.93"x16.93" 610.4x760x430mm | 60,000 BTU/H | 2 | NG:1.578m3/h LPG:0.68m3/h | 3/4" BSP Male | 70kg | 87.5kg | 740*915*530mm |
| RD-GD-36 | 35.84"x29.93"x16.93" 910.4x760x430mm | 90,000 BTU/H | 3 | NG:2.367m3/h LPG:1.02m3/h | 3/4" BSP Male | 96kg | 121kg | 1040*915*530mm |
| RD-GD-48 | 47.65"x29.93"x16.93" 1210.4x760x430mm | 120,000 BTU/H | 4 | NG:3.156m3/h LPG:1.36m3/h | 3/4" BSP Male | 136kg | 161kg | 1340*920*520mm |

PING EDGE SDN BHD

ADD: LOT 3210, JALAN BALAKONG, KAWASAN PERINDUSTRIAN KAMPUNG BARU BALAKONG
43300 SERI KEMBANGAN, SELANGOR, MALAYSIA