

# 1000-UP, 1000-UP/S

## Low-Temperature Hot-Food Holding Cabinet

ALTO-SHAAM

Keeping food that has been cooked to perfection hot and fresh until the moment it is served demands the gentle precision of Alto-Shaam's exclusive Halo Heat® technology. With controlled temperatures and a closed environment free from forced air, harsh heating elements, and added humidity, food is kept warm and flavorful, just as intended.

### Standard features

- Simple and intuitive pushbutton control that commands all appliance functions with easily identifiable icons
- Halo Heat—a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life
- Stainless steel interior resists corrosion
- Digital control senses temperature drops faster, providing quick heat recovery time
- Close temperature tolerance and even heat application maintain ideal serving temperature throughout the cabinet
- Antimicrobial handle retards the growth of illness-causing pathogens
- Door venting holds crispy food better

### Model 1000-UP/P

- Double cavity proofing cabinet with window doors.

### Deluxe control option (select one)

Deluxe control features SureTemp™ heat recovery system. SureTemp™ reacts immediately to compensate for any loss of heat whenever the door is opened.

- Deluxe control (A)
- Deluxe control with probe (A)
- Deluxe control with six (6) independent shelf timers (B)
- Deluxe control with probe and shelf timers (B)



TEMPERATURE

Temperature range: 16°C to 93°C



CAPACITY

- 4 Four full-size or GN 1/1 pans 65mm deep (on wire shelves only)
  - 8 Eight full-size sheet pans (optional)
  - 4 Four side racks with eight pan positions spaced on 75mm centers
- 54 kg product maximum  
76 L volume maximum



1000-UP

### Configurations (select one)

#### Door choices

- Solid door, standard
- Window door, optional—window standard on proofing cabinet

#### Door swing

- Right hinged, standard
- Left hinged, optional

#### Cabinet choices

- Reach-in, standard
- Pass-through, optional—note: pass-through cabinets cannot have doors hinged on the same side

#### Electrical

- 230V, 1 ph

#### Accessories (select all that apply)

- Bumper, full perimeter [5009767]
- Door lock with key—each handle [LK-22567]
- Security panel with lock—requires door lock [LK-22567] [5013934]
- Pan grid, wire, chrome plated—457mm x 660mm pan insert [PN-2115]
- Legs, 152mm, flanged—set of four [5011149]
- Drip pan with drain, 43mm deep [5005616]
- Drip pan without drain, 48mm deep [11906]
- Water reservoir pan—included with proofing cabinet [1775]
- Water reservoir pan cover—included with proofing cabinet [1774]

#### Casters, stem—2 rigid, 2 swivel w/ brake

- 89mm [5008017]
- 127mm [5004862]—standard


#### Shelves

- Stainless steel, reach-in [SH-2325]
- Stainless steel, pass-through [SH-2346]



# 1000-UP, 1000-UP/S

## DIMENSIONS

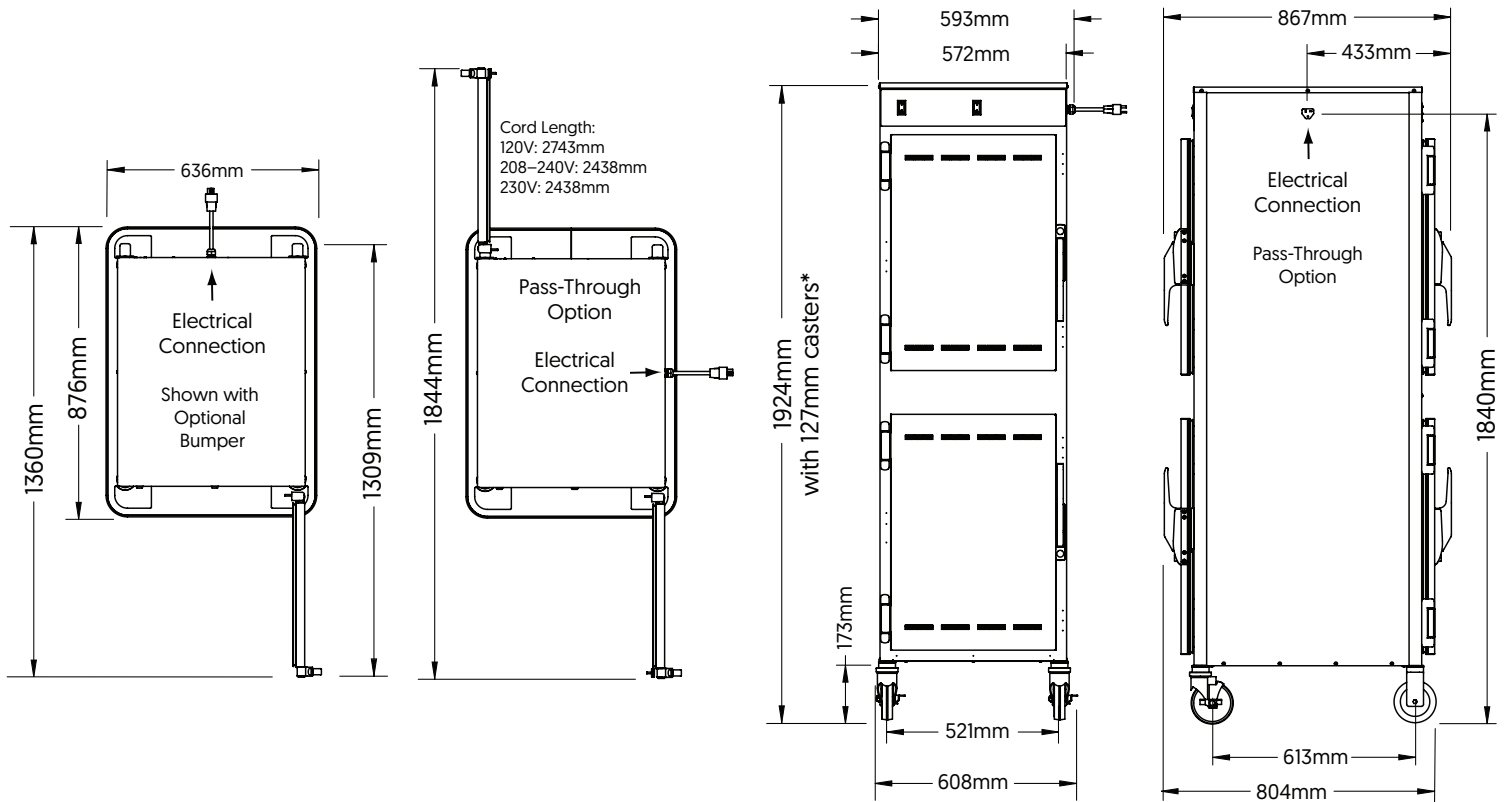

\*1881mm with optional 89mm casters  
 \*1921mm with optional 152mm legs



## DIMENSIONS

**Model**  
1000-UP

**Exterior (H x W x D)**  
1924mm x 608mm x 804mm

**Interior—each compartment (H x W x D)**  
682mm x 479mm x 673mm

**Pass-Through Exterior**  
1924mm x 608mm x 867mm

**Net Weight**  
128 kg

1000-UP

**Ship Dimensions (L x W x H)\***  
889mm x 889mm x 2083mm

**Ship Weight\***  
163 kg

\*Domestic ground shipping information. Contact factory for export weight and dimensions.

# 1000-UP, 1000-UP/S



## REQUIREMENTS

- Appliance must be installed level.
- Appliance must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.
- Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector. Not factory supplied.







## CLEARANCE

- Top: 51mm
- Left: 25mm
- Right: 25mm
- Back: 76mm



## ELECTRIC

1000-UP	V	Ph	Hz	A	kW	Cord & Plug
230V	230	1	50/60	7.7	1.8	Plugs rated 250V CEE 7/7 
						CH2-16p 
						BS 1363 (U.K. only) 
						AS/NZS 3112 



## HEAT

### Heat of rejection

1000-UP	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	385	0.11

## CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)