

COMBINATION OVENS ALTO-SHAAM.



Solutions that **advance your business.**

When you're faced with challenges, trust Alto-Shaam to deliver solutions and support when and where you need it. Our equipment systems are designed to add value to your business, helping create superior food experiences that drive long-term profitability. We pioneer equipment that is intuitive and dependable—giving you the confidence and support you need to embrace changes in rapidly evolving markets.

With headquarters and manufacturing in Menomonee Falls, Wisconsin, Alto-Shaam proudly provides foodservice equipment solutions made in the USA to more than 90 countries globally.



Ultimate efficiency and performance.

There are other combi ovens out there, but none match the efficiency and performance of Alto-Shaam. The key is the boilerless steam generation standard on all Prodigy™ Pro and Classic oven models. Boilerless, flash-steam generation provides greater control over recovery, cooking times and food quality with the ability to adjust steam volume with precision. Maintain steam levels without a water reservoir. With boilerless steam generation, instead of heating water in a separate tank, cold or room temperature water is sprayed directly onto a heated surface to create steam. Then, auto-reversing fans circulate steam throughout the oven chamber.




This boilerless design results in 80% less water usage, superior performance, and improved reliability. Operators also reduce maintenance costs associated with boiler parts and labor. No boiler maintenance. No boiler heating element burnout. No water buildup. And you still get the versatility to cook with variable steam, convection steam or a combination of both.



Further reduce energy usage and water consumption with ENERGY STAR® certified models.


Boilerless Technology 80% Less Water Usage

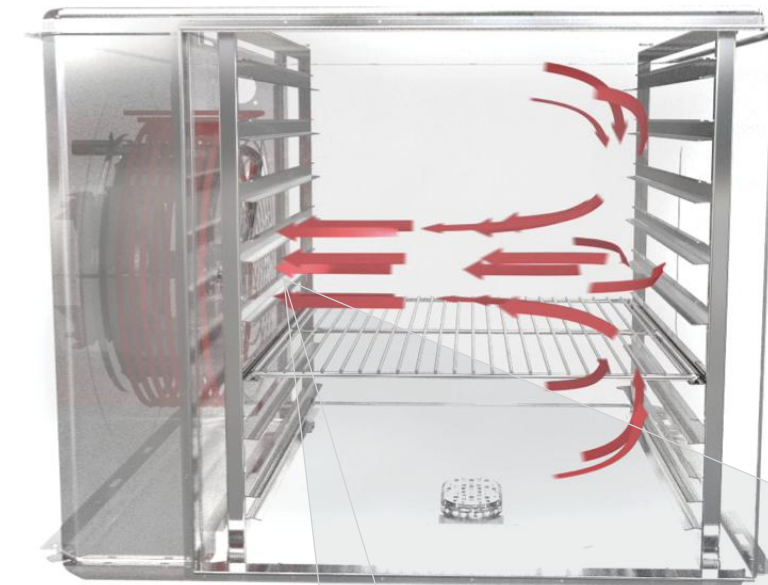

Auto-reversing fan circulates the generated steam throughout the oven chamber.

No separate water tank to maintain, clean and repair.

Adjust steam volume with precision using flash-steam generation.

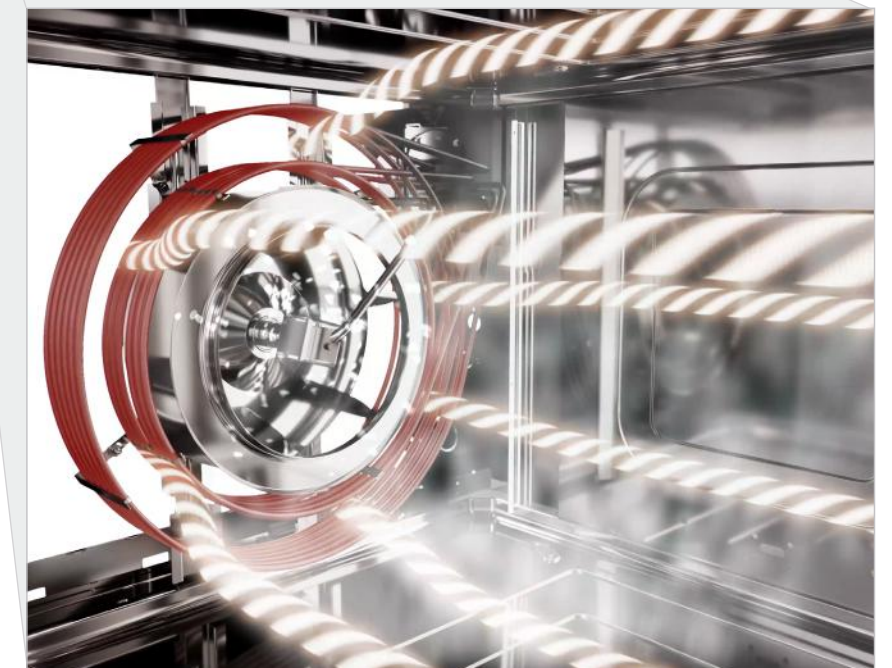

Engineered for dependability.

Designed to be an indispensable centerpiece of your kitchen, we engineered Prodigy ovens for legendary durability and proven results. Maximize food quality, texture and yield with enhanced precision and control. Simple navigation and recipe management increases productivity—and ensures consistency with every dish. Take a closer look and you'll find unique, innovative features and accessories inside and out.

Available in a variety of sizes and configurations, Prodigy ovens are ideal for any operation seeking to enhance food quality while optimizing kitchen space and reducing labor costs.



Purposeful Design

80% less water usage

with boilerless steam generation. Superior performance, improved reliability, and less maintenance costs associated with boiler parts and labor.




Zero clearance design

saves valuable space under the exhaust hood and reduces ventilation costs. Place next to any piece of equipment anywhere on the line.

Reduced, Eco, and Turbo power levels

Enhanced production. Improved temperature control. Quicker recovery times.

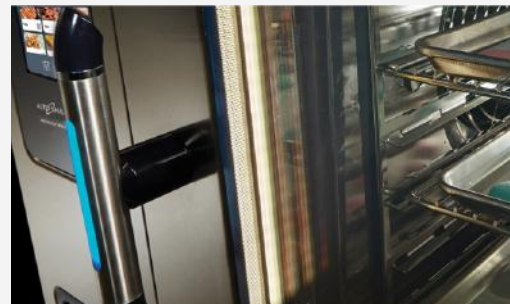

LED illuminated door handle

is designed for the needs of the busy kitchen and provides visual notification of the oven status.



Front-accessible, retractable rinse hose

PROrinse™ high-efficiency spray head.



Removable food probe

can be easily replaced and calibrated. Improve reliability while reducing oven downtime and repair costs. Sous vide probe optional.

Absolute Humidity Control™

allows for selection of any humidity level from 0–100% to maximize food quality, texture, and yield. The five-speed, auto-reversing fan provides balanced airflow for ideal product browning, texture and finish.




Smoke hot or cold smoke with real wood chips. Seamlessly-integrated optional **CombiSmoke® feature** has no impact on door seal or oven performance. Rinse away smoke flavor and residue after use.



Innovative Safety

Keep employees safe.

SafeVent™ venting system automatically vents heat and steam during the last 60 seconds of the cooking cycle. Open the door as soon as the cooking cycle ends without exposure to heat and steam.

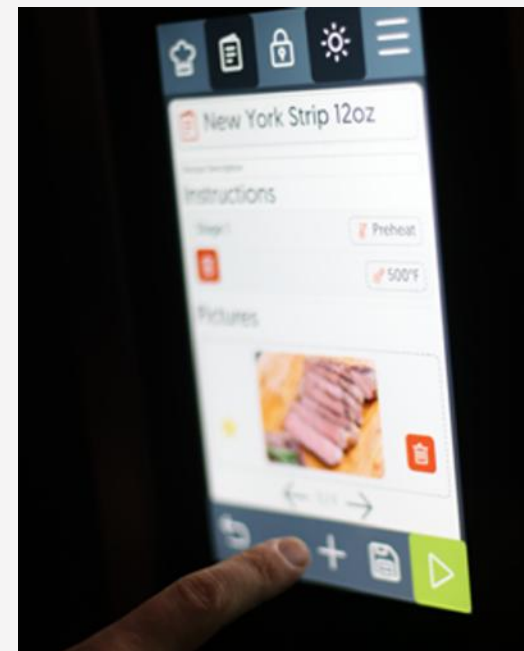

Labor Savings

Take the guesswork out of oven operation

with an intuitive, customizable control. Programmable, image-based recipes and one-touch cooking allow any level of labor to execute menuitems at the highest quality.

Execute automatic software downloads, push and pull recipes, view detailed reports and more from a single location with **chef*linc* remote oven management.**



Reduce labor with automatic cleaning.

Five cycle options from “light clean” to “heavy plus” use safe, convenient cleaning tablets or optional liquid cleaner.

cheflinc™

Cloud-based remote oven management **made simple.**



Connected Insights.

View real-time connectivity status, cooking state, HACCP data, service alerts and more from any location. Stay connected with the ability to email selected alerts to a customized list or service provider outside of ChefLinc software.



Effortless Recipe Management.

Create, manage and push recipes, regional menus, limited-time offers and more with a centralized recipe library. The capability to push and pull oven recipes reduces variables for error and ensures consistency across multiple locations. Save time and labor by eliminating the need to transfer and upload recipes via USB or manually program recipes onto ovens.




Intentionally Simple Design.

Easily navigate the dashboard with icons, descriptions, pictures and filtering. An overview homepage allows operators to view locations, units and any alerts. Admin, unit settings, recipe library, reports and locations pages are also intuitive to operate.



Reliable Data.

Effortlessly record, monitor and store operational and cooking data to improve kitchen efficiency and maximize profits. Eight detailed reports provide data-driven insights that can be integrated with existing business systems for a truly connected foodservice operation.

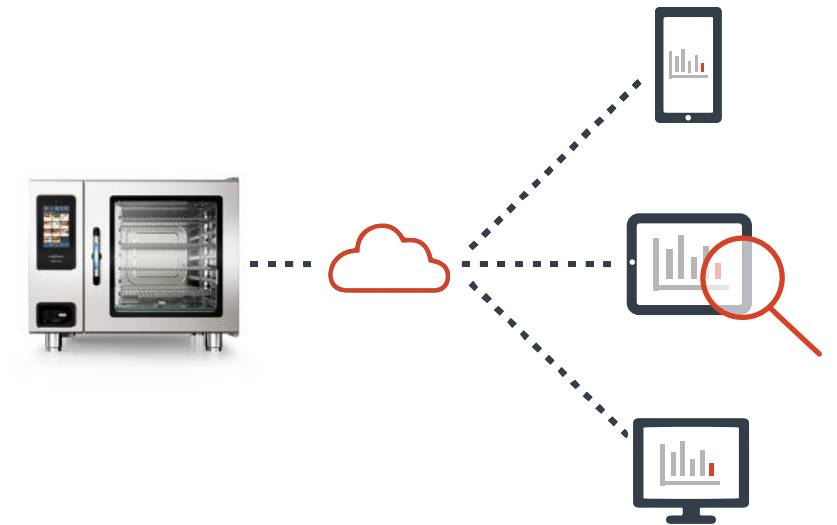

Next-Level Service.

Understand alerts, minimize oven downtime and reduce service calls with real-time service diagnostics, detailed alert codes and comprehensive action steps. Receive accurate, reliable service support with reports and dashboard mirroring. Ensure ovens are operating properly with updated software automatically pushed to ovens. Eliminate second-guessing and the need to manually upload and download software via USB.



Consistent Settings.

Streamline oven management with the ability to categorize and group ovens by location, menu or any other factor. Push specific settings to oven groups such as brightness, volume, preheat settings, language and more.

Countertop, Stackable Ovens



cheflinc enabled

***6-10 Pro** (Available in Electric or † Gas)**PRODUCT CAPACITY**
72 lb [33 kg]**VOLTAGES**208–240V, 1Ph, 50/60Hz
208–240V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz [Gas Only]**PAN CAPACITY**Seven (7) full-size hotel or GN 1/1 pans
Six (6) half-size sheet pans
*Six (6) full-size hotel or GN 1/1 pans
*With smoker**DIMENSIONS (H x W x D)**35-5/16" x 35-11/16" x 40-1/16"
[898mm x 906mm x 1018mm]**NET WEIGHT**
395 lb [179 kg]**SHIPPING WEIGHT**
557 lb [253 kg]

cheflinc enabled

***10-10 Pro** (Available in Electric or † Gas)**PRODUCT CAPACITY**
120 lb [54 kg]**VOLTAGES**208–240V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz [Gas Only]
208–240V, 1Ph, 50/60Hz [Gas Only]**PAN CAPACITY**Eleven (11) full-size hotel or GN 1/1 pans
Ten (10) half-size sheet pans
*Ten (10) full-size hotel or GN 1/1 pans
*With smoker**DIMENSIONS (H x W x D)**46" x 35-11/16" x 40-1/16"
[1169mm x 906mm x 1018mm]**NET WEIGHT**
497 lb [225 kg]**SHIPPING WEIGHT**
664 lb [301 kg]

cheflinc enabled

***7-20 Pro** (Available in † Electric or † Gas)**PRODUCT CAPACITY**
168 lb [76 kg]**VOLTAGES**208–240V, 3Ph, 50/60Hz
380–415V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz [Gas Only]
208–240V, 1Ph, 50/60Hz [Gas Only]**PAN CAPACITY**Sixteen (16) full-size hotel or GN 1/1 pans
Seven (7) full-size sheet pans
*Fifteen (15) full-size hotel or GN 1/1 pans
*With smoker**DIMENSIONS (H x W x D)**37-11/16" x 43-3/4" x 44-13/16"
[958 mm x 1111 mm x 1138 mm]**NET WEIGHT**
519 lb [235 kg]**SHIPPING WEIGHT**
708 lb [351 kg]

cheflinc enabled

***10-20 Pro** (Available in † Electric or † Gas)**PRODUCT CAPACITY**
240 lb [109 kg]**VOLTAGES**208–240V, 3Ph, 50/60Hz
380–415V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz [Gas Only]
208–240V, 1Ph, 50/60Hz [Gas Only]**PAN CAPACITY**Twenty-two (22) full-size hotel pans
or GN 1/1 pans
Ten (10) full-size sheet pans
*Twenty-one (21) full-size hotel pans
or GN 1/1 pans
*With smoker**DIMENSIONS (H x W x D)**46" x 43-3/4" x 44-13/16"
[1169mm x 1111mm x 1138mm]**NET WEIGHT**
760 lb [345 kg]**SHIPPING WEIGHT**
805 lb [365 kg]

Free-Standing Ovens



cheflinc enabled

20-10 Pro (Available in Electric or † Gas)**PRODUCT CAPACITY**
240 lb [109 kg]**VOLTAGES**208–240V, 3Ph, 50/60Hz
380–415V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz**PAN CAPACITY**Twenty (20) full-size pans or GN 1/1 pans
Twenty (20) half-size sheet pans**NET WEIGHT**

905 lb [411 kg]

SHIPPING WEIGHT

1052 lb [477 kg]

DIMENSIONS (H x W x D)78-11/16" x 36-1/16" x 40-13/16"
[1998mm x 915mm x 1036mm]

cheflinc enabled

20-20 Pro (Available in † Electric or † Gas)**PRODUCT CAPACITY**
480 lb [218 kg]**VOLTAGES**208–240V, 3Ph, 50/60Hz
380–415V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz [Gas Only]
208–240V, 1Ph, 50/60Hz
[Gas Only]**PAN CAPACITY**Forty (40) full-size hotel or GN 1/1 pans
Twenty (20) full-size sheet pans**NET WEIGHT**

994 lb [420 kg]

SHIPPING WEIGHT

1267 lb [574 kg]

DIMENSIONS (H x W x D)78-11/16" x 44" x 45-9/16"
[1998mm x 1118mm x 1157mm]

† This oven has earned the ENERGY STAR from the U.S. Environmental Protection Agency.

*Available with Ventech™ or Ventech™ PLUS Type 1 hood with condensation technology [Electric Only]

Countertop, Stackable Ovens

*** 6-10 Classic** (Available in Electric or Gas)**PRODUCT CAPACITY**
72 lb (33 kg)**VOLTAGES**
208–240V, 3Ph, 50/60Hz
380–415V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz (Gas Only)**PAN CAPACITY**
Seven (7) full-size hotel or GN 1/1 pans
Six (6) half-size sheet pans
Six (6) full-size or GN 1/1 pans**DIMENSIONS (H x W x D)**
35-5/16" x 35-11/16" x 40-1/16"
[898mm x 906mm x 1018mm]**NET WEIGHT**
395 lb (179 kg)**SHIPPING WEIGHT**
557 lb (253 kg)*** 10-10 Classic** (Available in Electric or Gas)**PRODUCT CAPACITY**
120 lb (54 kg)**VOLTAGES**
208–240V, 3Ph, 50/60Hz
380–415V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz (Gas Only)**PAN CAPACITY**
Eleven (11) full-size hotel or GN 1/1 pans
Ten (10) half-size sheet pans
Ten (10) full-size hotel or GN 1/1 pans**DIMENSIONS (H x W x D)**
46" x 35-11/16" x 40-1/16"
[1169mm x 906mm x 1018mm]**NET WEIGHT**
497 lb (225 kg)**SHIPPING WEIGHT**
664 lb (301 kg)*** 7-20 Classic** (Available in Electric or Gas)**PRODUCT CAPACITY**
168 lb (76 kg)**VOLTAGES**
208–240V, 3Ph, 50/60Hz
380–415V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz (Gas Only)**PAN CAPACITY**
Sixteen (16) full-size hotel or GN 1/1 pans
Seven (7) full-size sheet pans
Fifteen (15) full-size hotel or GN 1/1 pans**DIMENSIONS (H x W x D)**
37-11/16" x 43-3/4" x 44-13/16"
[958 mm x 1111 mm x 1138 mm]**NET WEIGHT**
519 lb (235 kg)**SHIPPING WEIGHT**
708 lb (321 kg)*** 10-20 Classic** (Available in Electric or Gas)**PRODUCT CAPACITY**
240 lb (109 kg)**VOLTAGES**
208–240V, 3Ph, 50/60Hz
380–415V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz**PAN CAPACITY**
Twenty-two (22) full-size pans
or GN 1/1 pans
Ten (10) full-size sheet pans
Twenty-one (21) full-size pans
or GN 1/1 pans
Nine (9) full-size sheet pans**DIMENSIONS (H x W x D)**
46-3/8" x 43-3/4" x 44-13/16"
[1178mm x 1111mm x 1138mm]**NET WEIGHT**
554 lb (251 kg)**SHIPPING WEIGHT**
773 lb (351 kg)

Free-Standing Ovens

**20-10 Classic** (Available in Electric or † Gas)**PRODUCT CAPACITY**
240 lb (109 kg)**VOLTAGES**
208–240V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz**PAN CAPACITY**
Twenty (20) full-size hotel pans or GN 1/1 pans
Twenty (20) half-size sheet pans**NET WEIGHT**
905 lb (411 kg)**SHIPPING WEIGHT**
1052 lb (477 kg)**DIMENSIONS (H x W x D)**
79-1/4" x 36-1/16" x 40-13/16"
[2012mm x 915mm x 1072mm]**20-20 Classic** (Available in † Electric or † Gas)**PRODUCT CAPACITY**
480 lb (218 kg)**VOLTAGES**
208–240V, 3Ph, 50/60Hz
440–480V, 3Ph, 50/60Hz
120V, 1Ph, 60Hz (Gas Only)**PAN CAPACITY**
Forty (40) full-size hotel or GN 1/1 pans
Twenty (20) full-size sheet pans**NET WEIGHT**
994 lb (420 kg)**SHIPPING WEIGHT**
1267 lb (574 kg)**DIMENSIONS (H x W x D)**
78-11/16" x 43-3/4" x 47"
[1998mm x 1111mm x 1192mm]

† This oven has earned the ENERGY STAR from the U.S. Environmental Protection Agency.

*Available with Ventech™ or Ventech™ PLUS Type 1 hood with condensation technology (Electric Only)

No hood? **No problem.**



Ventech™ and Ventech™ PLUS Type 1 hoods with condensation technology are available on a variety of Combitherm® ovens to meet the needs of your foodservice operation.

Maximize space and reduce costs.

It costs approximately \$2,000 per linear foot to install a traditional kitchen hood, and even more additional costs to run it daily. Ventech and Ventech PLUS hoods put money back in your pocket by eliminating the need for expensive oven hoods and costly hood installations. With no traditional hood restrictions, operators are able to place combi ovens with Ventech anywhere in the kitchen—maximizing floor space while improving efficiency and workflow.



Available on single or stacked models, Ventech hoods condense steam while capturing and removing grease-laden air, vapors and lingering smoke. No separate power supply for the hood is required—power for the condensation hood is sourced directly from the oven. Hoods are available as a factory-installed option, and field installations are also available.

For more demanding locations, Ventech PLUS features a special HEPA filter along with Ventech condensation technology to capture smoke-related vapor and steam generated in the cooking process.



Which combination oven is best for my operation?

Alto-Shaam has two great control options for foodservice operators looking to cook high volumes of high-quality, consistent food in a single footprint. Whether you choose a Prodigy™ Pro or Prodigy™ Classic model, you can trust that both options will significantly add value to your business—saving on both labor and operating costs. For more information on which combination oven is best for your operation's needs, reference the chart below.

	 7-20 Classic Prodigi™ Classic Combination Oven	 7-20 Pro Prodigi™ Pro Combination Oven
CONTROL	7" Capacitive Touch Screen	10.1" Capacitive Touch Screen
COOK OPTIONS	Programmable recipe library Professional mode	Image-based, programmable recipe library Professional mode Manual cook
RECIPE TIMERS	Fully programmable with up to 10 timers available	Fully programmable with up to 10 timers available
IOT CAPABILITY	N/A	ChefLinc™ Remote Oven Management - Automatic software updates - Recipe push/pull from anywhere - Consistent oven settings across multiple locations - Detailed reports [Total Completed Cooks, Unit Recipes, Unit Status, Cancelled Cooks, Wi-Fi Signal Strength, Power Cycles, Alert History, Control Board Temperatures] - Service alerts
HUMIDITY CONTROL	Absolute Humidity Control™ allows for selection of any humidity level from 0–100%	Absolute Humidity Control™ allows for selection of any humidity level from 0–100%
STEAM GENERATION	Boilerless steam generation	Boilerless steam generation
FAN SPEED	2 speed fan - Low (40%) - High (100%)	5 speed, auto-reversing fan - 20% - 40% - 60% - 80% - 100%
CLEANING	Tablet standard	Tablet standard and liquid option available
DOOR CONSTRUCTION	Dual-pane glass	Triple-pane glass
LIGHTED HANDLE	N/A	Yes - LED lighted handle provides visual notification of oven status
PROBE	T-style probe optional	T-style probe standard
VENTLESS HOOD OPTIONS	Ventech™ Type 1 Condensation Hood Ventech™ PLUS Type 1 Condensation Hood with HEPA Filter	Ventech™ Type 1 Condensation Hood Ventech™ PLUS Type 1 Condensation Hood with HEPA Filter
SMOKE OPTION	N/A	Fully-integrated smoker box has no impact on oven capacity, door seal or oven performance Smoke hot or cold with real wood chips
GREASE COLLECTION	N/A	Automatic, pump-style grease collection into easily disposable containers
ENERGY STAR CERTIFICATION	- 20-10G Classic - 20-20G Classic - 20-10E Classic	- 6-10G Pro - 10-10G Pro - 7-20E Pro - 7-20G Pro - 10-20G Pro - 10-20E Pro - 20-10G Pro - 20-20G Pro - 20-20E Pro
INSTALLATION PACKAGE	Yes	Yes
WATER TREATMENT OPTIONS	Water Filtration RO System	Water Filtration RO System

Unrivaled cooking power
and flexibility.



CONVERGE® MULTI-COOK COMBI




Three combis in one.

Bringing together the versatility of **combi cooking**, the power of **Structured Air Technology®**, and the flexibility of a **multi-cook**, Converse ovens provide endless cooking possibilities. Control the temperature, fan speed, humidity level and cook time in each individual combi oven chamber. Cooking applications feature Structured Air Technology, controlled humidity, or a combination of both. Steam, air fry, bake, grill and more all at the same time without flavor or moisture transfer.

Yes, really.



SCAN FOR COLLECTION

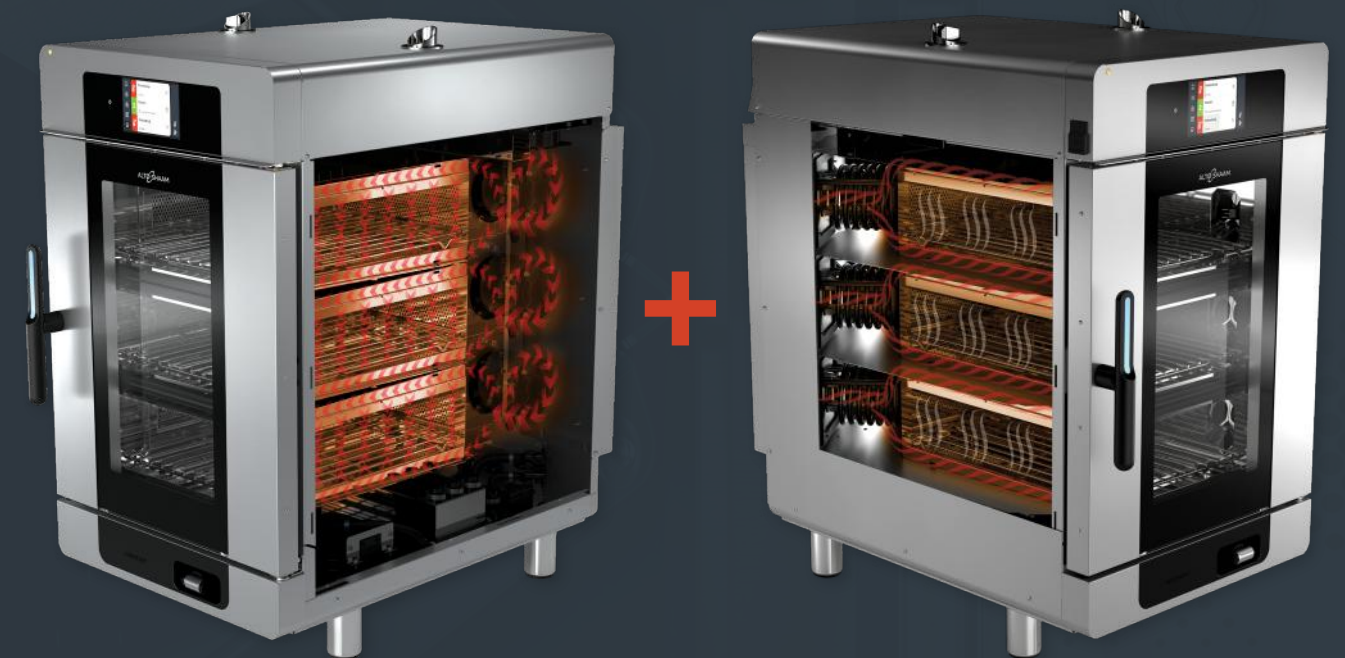

STRUCTURED AIR TECHNOLOGY®

Structured Air Technology®

Deliver the same high-quality food every time. Structured Air Technology provides superior cooking evenness with vertical air. This optimized, focused heat delivers faster, more efficient and consistent cooking than other cooking methods. No food degradation. No hot or cold spots.

BOILERLESS STEAM GENERATION


Boilerless Steam Generation

Improve oven reliability with a boilerless steam generation in each individual oven chamber. Eliminate required maintenance and costs associated with traditional boiler parts and labor.

Converge®

Multi-Cook Combi Ovens

Versatile, on-demand food production.



Three combis in one.

Available with two or three independent oven chambers, Converge ovens significantly increase food production capacity, without increasing costs. Execute a variety of cooking applications—all at once—with zero flavor transfer.

Self-cleaning design.



Automatic, self-cleaning programs do the dirty work for you and your employees—saving both time and labor costs. Five cleaning options from “rinse” to “heavy clean” use safe, convenient cleaning tablets and spray cleaner.

- Control the temperature, fan speed, humidity level [0-100%] and cook time **in each individual oven chamber.**
- **Save space** with a compact and ventless 24" (610mm) footprint.
- Place on a stand or stack with a holding cabinet, warming drawer or additional multi-cook oven to **further maximize space.**
- Ensure menu consistency and **reduce the need for skilled labor** with an advanced touchscreen control and multi-step, programmable recipes.
- Push and pull recipes, view real-time oven data, update software and more from anywhere with cheflinec remote oven management system.



Converge® Ovens | H Series Countertop



chef*linc* enabled

2-Chamber Combi Oven (Available in Deluxe or Simple Control)

MODEL NUMBER
CMC-H2H

CAPACITY DIMENSIONS
2 Full-Size Hotel Pans x 4"
2 GN 1/1 Pans x 100mm
or 2 Half-Size Sheet Pans x 1"
2 GN 2/3 Pans x 25mm

DIMENSIONS H x W x D
38-3/8" x 24-7/16" x 40-1/4"
(975mm x 621mm x 1023mm)

SHIPPING WEIGHT
400 lb (181kg)

VOLTAGES
208-240V, 1PH, 50/60Hz
208-240V, 3PH, 50/60Hz

NET WEIGHT
304 lb (138kg)



chef*linc* enabled

3-Chamber Combi Oven (Available in Deluxe or Simple Control)

MODEL NUMBER
CMC-H3H

CAPACITY DIMENSIONS
3 Full-Size Hotel Pans x 4"
3 GN 1/1 Pans x 100mm
or 3 Half-Size Sheet Pans x 1"
3 GN 2/3 Pans x 25mm

DIMENSIONS H x W x D
46" x 24-7/16" x 40-1/4"
(1168mm x 621mm x 1023mm)

SHIPPING WEIGHT
490 lb (222kg)

VOLTAGES
208-240V, 3PH, 50/60Hz

NET WEIGHT
394 lb (179kg)

Pan Dimensions

FULL-SIZE HOTEL PANS (GN 1/1): 20" x 12"	HALF-SIZE HOTEL PANS (GN 1/2): 12" x 10"	GN 2/3 PAN: 354mm x 325mm
FULL-SIZE SHEET PANS: 18" x 26"	HALF-SIZE SHEET PANS: 18" x 13"	

The specifications in this catalog are for basic information only. Refer to individual unit specification sheets for more details and configuration options.



A partner you can rely on.

At Alto-Shaam we're relentlessly driven to design and manufacture products that perform flawlessly in the most demanding conditions to give operators confidence and consistency in every meal. And our team is just as committed to providing industry-leading service and support. From installation consultation to equipment training to around the clock, every day technical assistance to culinary support—you can trust that we are here for you.



Menomonee Falls, WI U.S.A.
 Phone 800-558-8744 | +1-262-251-3800 | alto-shaam.com

Full Line Commercial Kitchen Equipment:

- Combination Ovens
- Food Wells
- Smokers
- Rotisseries
- Merchandisers & Display Cases
- Cook & Hold Ovens
- Heated Holding
- Quickchillers™
- Carving Stations
- Multi-Cook Ovens

EXPERIENCE A

TASTE

OF ALTO-SHAAM

SEEING IS BELIEVING

Your equipment purchase shouldn't be taken lightly. Get the confidence you need by attending an interactive demonstration.

Click [here](#) to schedule a demo today!

ASIA
 Shanghai, China
 Phone +86-21-6173-0336

AUSTRALIA
 Brisbane, Queensland
 Phone 800-558-8744

CANADA
 Concord, Ontario Canada
 Toll Free Phone 866-577-4484
 Phone +1-905-660-6781

FRANCE
 Aix en Provence, France
 Phone +33(0)4-88-78-21-73

GMBH
 Bochum, Germany
 Phone +49 (0)234 298798-0

ITALY
 Firenze, Italy
 Phone +39 3319273313

INDIA
 Pune, India
 Phone +91 9657516999

MEXICO
 Phone 262-251-3800 Ext. 6506

MIDDLE EAST & AFRICA
 Dubai, UAE
 Phone +971-4-321-9712

CENTRAL & SOUTH AMERICA
 Miami, FL USA
 Phone 262-251-3800 Ext. 6506

ALTO-SHAAM®