



Ovens

ADVANCE CONCEPT ovens

ADVANCE CONCEPT OVEN, ACE-101

19011022

DIMENSIONS

		Article	Packed
Length	mm	898,00	1.100,00
Depth	mm	867,00	1.000,00
Height	mm	1.117,00	1.270,00
Weight	Kg	169,00	224,00
Volumen	m3	0,87	1,54

ELECTRICITY

Electric power	KW	18,30
230V - I+N		
230V - III	3x10+T - 63 A	
400V - III+N	4x6+T - 32 A	

PLUMBING - WATER

Water consumption (lit/h)	40,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 62,00

ADVANCE CONCEPT OVEN, ACE-101

Technology made simple :

- Affordable a
- Easy to use
- Efficient
- Simple
- Perfect results

Capacity for 10 1/1-GN trays.

Digital push-button controls and two "Scroll" buttons.

Cooking methods:

Steam, Combi and Convection (up to 300°C).

Steam generated by injection in the cooking chamber.

Electronic temperature core probe.

Preheating option.

3 Speeds - 2 power ranges.

Cold-Down chamber cooling system.

"Auto-reverse" system to reverse fan rotation.

Error detection system.

Quick door-closing system.

"Repair service" mode system.

IPX-5 protection.


Power: 9.3 or 18.3 kW.


Dimensions: 868 x 867 x 1.117 mm.

Accessories in option:


- Retractable shower
- Support SH-101
- Neutral support-cabinet ANH or hot cabinet ACH
- Structure for trays EB-101, for dishes EP101, and loading trolley CP-101.
- GN trays, grids, moulds...

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	742	620	110		
COLD WATER	825	482	110	3/4"	
DRAIN	467	237	110	30x25	
SOFT COLD WATER	825	557	110	3/4"	




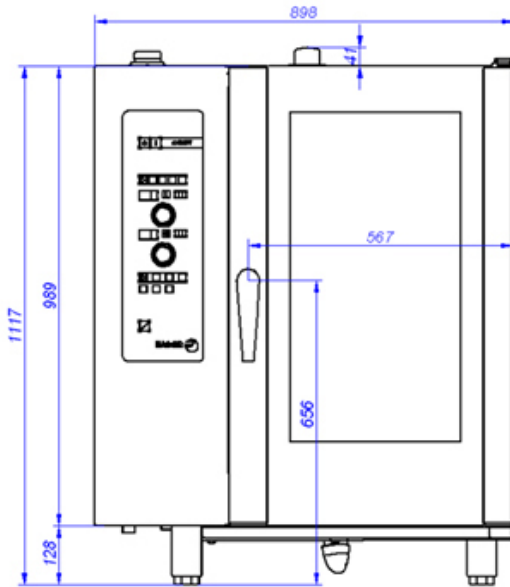

ACE-101

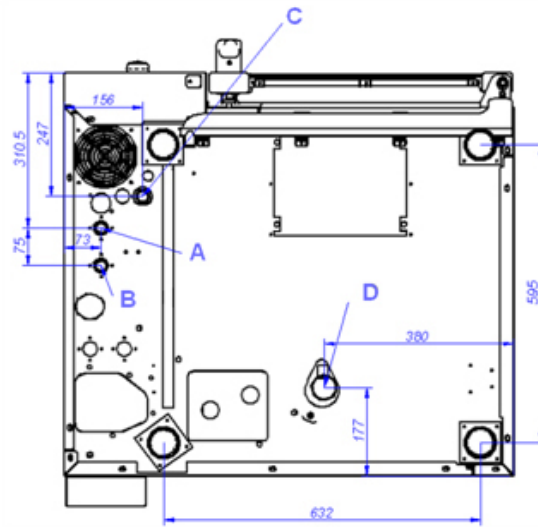

VISTA DE LA BASE DESDE LA PARTE INFERIOR
VIEW FROM THE BOTTOM OF THE MACHINE

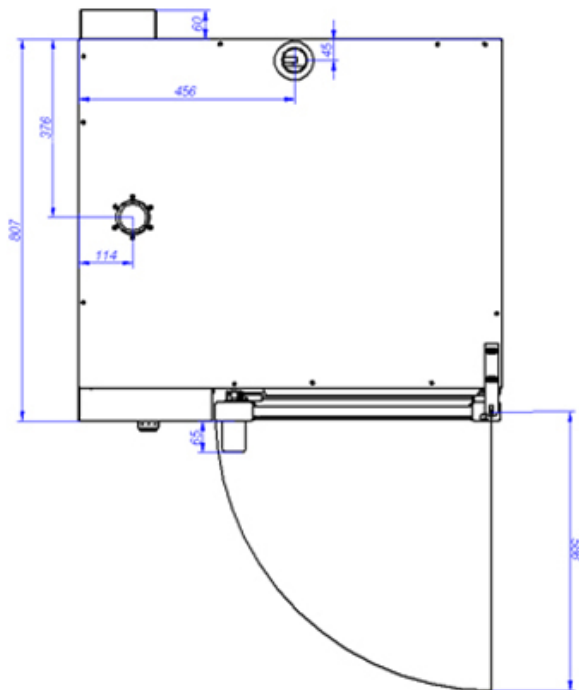

A: Entrada de agua blanda
B: Entrada de agua dura
D: Desagüe
C: Alimentación eléctrica

A: Soft water inlet
B: Water inlet
D: Drain

C: Electrical connection