

NW 508



Scotsman
Ice Systems

Modular Ice Machine up to 225 kg

Item #:

Project:

Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 508
Dice 10 g
L 22 x P 22 x H 22 mm



NW H 508
Half Dice 6 g
L 10 x P 22 x H 28 mm



NW L 508
Large Dice 15 g
L 28 x P 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
NW 508	✓	SB193	129
	✓	SB322	168
	CBT30EMCD	SB393	181
	CBT30EMCD	SB530	243

LEGEND:

- ✓ : Perfect combination between ice maker and bin
● : Ice chute cut-out performed upon installation
CBTxxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:

and specifications are subject to change without notice. This technical sheet is meant for commercial use only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**

Apple store
Google play
Windows store

DOWNLOAD

CN C&N UNITED CORPORATION
www.cnunited.com.my

Modular Ice Machine up to 225 kg

1 August 2018

NW 508

EASY


Scotsman®
Ice Systems

Modular Ice Machine up to 225 kg

Item #:

Project:

Quantity:

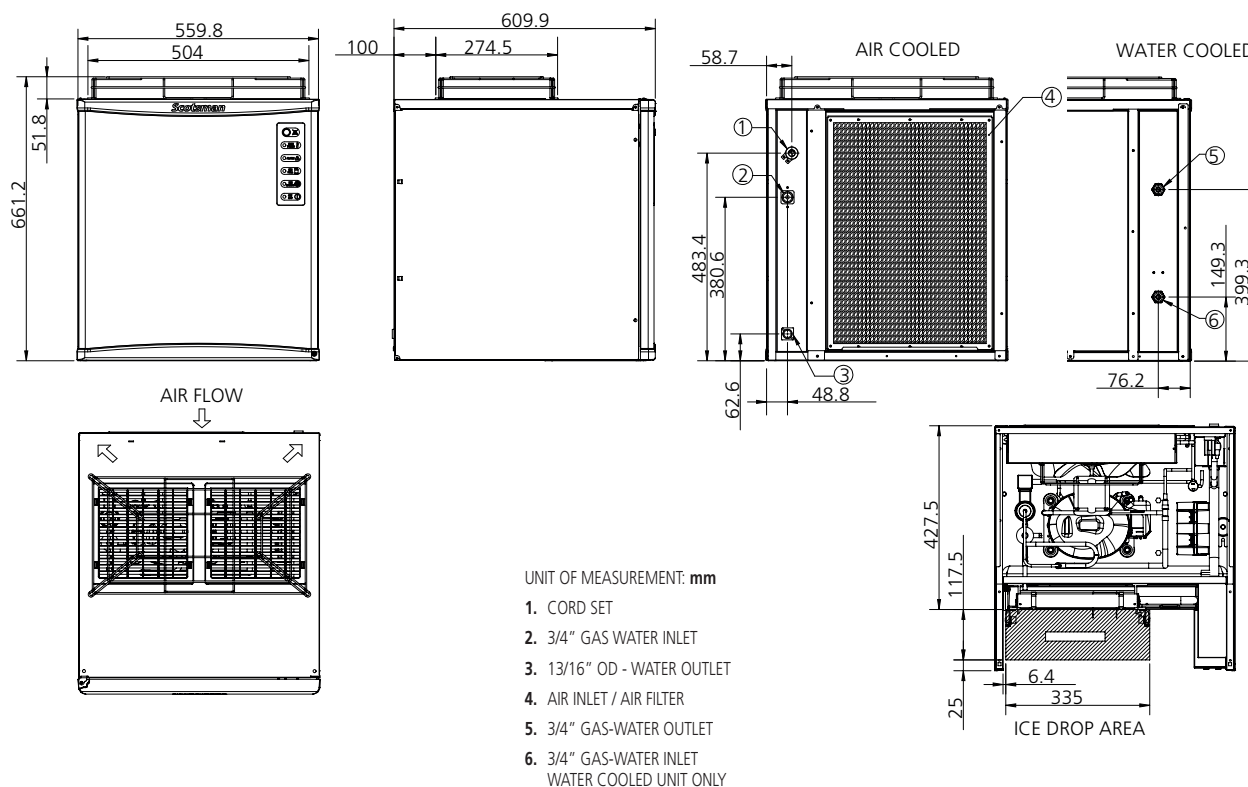

UNIT DATA

Size (W x D x H) 558 x 610 x 609 mm

Net weight 67 kg

SHIPPING DATA

Carton (W x D x H) 620 x 680 x 800 mm

Weight 77 kg

Version	Voltage	Compressor		Circuit wires		Max. fuse size	
		Btu/h	W	No.	Ømm²	A	
NW 508 AS	230/50/1	8872	2600	3	1.5	16	
NW 508 WS	230/50/1	0					
NW H 508 AS	230/50/1	8872	2600	3	1.5	16	
NW H 508 WS	230/50/1	0					
NW L 508 AS	230/50/1	8872	2600	3	1.5	16	
NW L 508 WS	230/50/1	0					

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 508 AS	Air	230/50/1	215	200	150	16.3	24.5	10.3	1250
NW 508 WS	Water	230/50/1							
NW H 508 AS	Air	230/50/1	225	205	155	14.8	22.9	10.1	1250
NW H 508 WS	Water	230/50/1							
NW L 508 AS	Air	230/50/1	210	200	145	15.9	23.0	9.7	1250
NW L 508 WS	Water	230/50/1							

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions