


Banquet Cart Chiller & Warmer


General Features 宴会车

Designed for safely transporting food from a kitchen to a serving/ banqueting area
设计用于将食品安全的从厨房运到设宴区域

- 01 • GN pan designed.
柜体尺寸按可配GN盘设计
- 06 • High density 75mm thick insulation foam with zero ODP (Ozone Depletion Potential) and low GWP (Global Warming Potential)
75mm厚的高密度聚氨酯环保发泡层
- 08 • Removable door gasket, easy to replace the heaters inside.* 门框加热丝可更换
- 10 • Over 90° door opening allows easy loading and stock checking 开门角度可超过90度，便于食品放置和库存检查
- 13 • Self developed control system can examine the faulty automatically, and display the relative codes on the digital controller, which makes the maintenance much easier and more effective.
控制系统自动检测设备状况并自动显示故障代码




- Round corners design, easy for cleaning.
内箱易藏污垢处全圆角设计，易于清洁
- Forced air cooling system ensures effective air circulation.*
强制风冷循环系统，制冷快速、柜温均匀

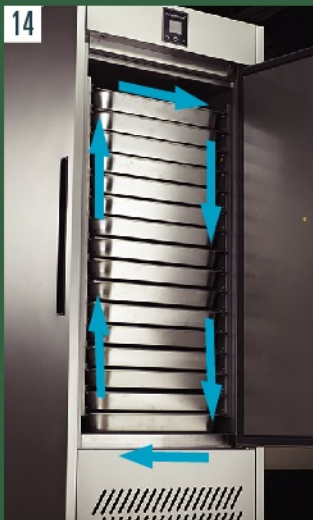

- #304 stainless steel exterior and interior finish
All round non-marking bumper for added protection during transfer of cabinet
内外采用304不锈钢材料，持久耐用，清洗方便，具有高耐腐蚀性特性
- Built-in handles at four sides for easy mobility
四周内嵌式手柄，移动更方便
- 155Hmm heavy duty, non-marking swivel and braked castors for easy positioning
155mm重载带刹车脚轮，无障碍移动，可轻松定位

- Patented semi frequency variable technique using electronic expansion valve controlled by VFD (variable frequency drive), which can automatically adjusts the operating parameters, ensure wonderful working performance and lower energy consumption.
专利准变频电子膨胀阀制冷系统，配备自主研发的控制技术，自动调节制冷系统运行参数，节能高达30%，克服毛细管工况适应性差且制冷过程不能精确控制的缺点，且具备多重保护功能

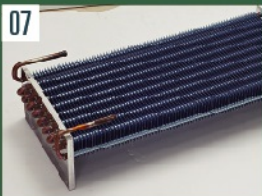

- Evaporator with coated fins provides high corrosion resistance properties*
亲水膜蒸发器，具有耐腐蚀性特性
- Self-closing doors design to prevent heat ingress and reduces energy consumption*
自动回归门设计，避免热气进入，减少能耗
- Adjustable anti-tilt tray slides, match GN design
可调节的层架防倾斜托条，配GN盘设计，且易于拆卸，存储灵活，清洗方便

- 15 • Hot gas defrost ensures the evaporator working to its optimum performance.*
热气除霜系统，除霜均匀快速，节能环保
- 16 • Automatically vaporizes defrost water, drainage is not required.*
自动蒸发化霜水，不需要排水管
- 17 • Audible and visual Er4, door open (over 3 minutes) alarm for freezer ensures food quality and minimises energy consumption*
门开超时报警，确保食物质量，并降低能源消耗
- 18 • The evaporator fan motor stops once the door opens to reduce energy consumption*
冷冻柜开门冷风机断电，避免冷气流失，降低能耗
- 19 • Fitted with circulation fans to ensure even temperature and fast warm-up throughout the cabinet#
配置循环风机，确保温度迅速均匀上升
- 20 • Equipped with automatic re-set safety cutout switch to prevent overheating#
配置自动安全超温感应开关保护，防止过热
- 21 • Environmental-friendly CFC-free refrigerant (R134a or R290)*
采用环保制冷剂
- 22 • Designed and engineered to operate from 0°C to 43°C ambient.
在0~43°C严酷的环境下仍可正常运行

* Banquet Cart Chiller # Banquet Cart Warmer

Specifications

- Accommodates 2/1 GN size
可置2/1GN盘
- Foodsafe 304 grade stainless steel exterior and interior
内外食品级304不锈钢
- Fitted with cylindrical lock
带圆形锁

Options

- Freezer type
可做冷冻型
- 220V/60HZ/1PH,110V/60HZ
电源电压可选

Banquet Cart Collection
宴会车

Product List

Banquet Cart Warmer Series 宴会热车



Banquet Cart Chiller Series 宴会冷车



Banquet Cart Collection
宴会车

Technical Data



Model 型号	A16HF	A32HF	A16SF	A32SF
Temp Range 温度范围	+70~+82 °C		-2~+4 °C	
External Dimension (mm) 外形尺寸				
Width 长	807	1470	807	1470
Depth 宽	885		885	
Height 高	1770		2000	
Internal Dimension (mm) 内部尺寸				
Width 长	588	1320	588	1320
Depth 宽	680		680	
Height 高	1315		1220	
Thickness of 304 grade stainless steel (mm) #304不锈钢厚度				
Exterior 外部	0.5			
Interior 内部	0.5			
Door 门	0.7			
Open Depth (mm) 开门深度	1430			
Capacity (cu.ft / liters) 容积	345L	690L	428L	791L
Power supply 电源	220V/50HZ(220V/60HZ, 110V/60HZ)			
Power Input - Running (amps)	6.5	6.9	3.1	3.56
Rating Power (watts) 功率	1400	1600	490	590
Compressor (HP) 压缩机	/		1/4	1/3
Refrigerant 制冷剂				
Type 类型	/		R134a	R134a
Weight (g) 灌注量			280	500
Standard fitting for door type 门式标准配件				
GN pan GN盘	16	32	16	32
Packing 包装	Simple package			
Packing Size(mm) 包装尺寸	860*960*1845	1523*960*1845	860*960*2180	1523*960*2180
Shipping 装柜数量				
Qty/20'GP	12	7	12	7
Qty/40'GP	26	15	26	15
Qty/40'HQ	26	15	26	15

Optional Refrigerant : R290