



Electrolux
PROFESSIONAL

Digital Cabinets Benefit - 4 Half Doors Digital Refrigerator, Stainless Steel - 1300 lt

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



790002 (SB130P4D)

Benefit Digital 4 Half Door
Refrigerator, Stainless Steel,
1300 lt - 230 V/1N/50Hz

790046 (SB130P4D6)

Benefit Digital 4 Half Door
Refrigerator, Stainless Steel,
1300 lt - 220 V/1N/60Hz

Short Form Specification

Item No. _____

Internal structure in 304 AISI stainless steel. External panels in stainless steel. High-density expanded polyurethane insulating foam, 60mm in thickness. Lockable doors with closure latch and microswitch to switch off the fan when the door is opened. Built-in refrigeration unit; ventilated operating mode; digital control; automatic defrost and evaporation of defrost water; external digital temperature display. For ambient temperatures up to 43 °C. CFC and HCFC free. R134a gas in refrigeration circuit. Supplied with n. 8x2/1GN nylon coated grids and n. 8 sets of 2 stainless steel grid runners.

Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- The digital control features service and HACCP alarms and can be connected to a remote computer.
- Refrigerator models have operating temperatures that can be adjusted from -2 to 10 °C to suit both meat and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Lockable door with closure latch.
- Extremely quiet operation at 51 Db(A).
- Automatic evaporation of defrost water.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.

Construction

- Internal structure in AISI 304 stainless steel and external structure in AISI 430 stainless steel as standard.
- Easy to clean, reversible self-closing door with balloon profile, magnetic door seal to guarantee perfect closure.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- CFC and HCFC-free insulation.
- Built-in compressor to suit operating conditions.
- Mounted on 150 mm adjustable feet.
- Electronic protection against high voltage peaks.
- Coated evaporator to avoid corrosion and to guarantee everlasting operation.
- Refrigerant type: R404a.
- Back panel in galvanized steel.

Included Accessories

- 8 of Kit of 1x2/1GN PVC grids with side runners for 600/1300lt refrigerated cabinets PNC 880297

Optional Accessories

- Kit of 4 low feet for cabinets PNC 880264 ☐

APPROVAL: _____



Experience the Excellence
www.professional.electrolux.com



Electrolux
PROFESSIONAL


Digital Cabinets
Benefit - 4 Half Doors Digital
Refrigerator, Stainless Steel - 1300 lt

- Kit of 1x2/1GN PVC grids with side runners for 600/1300lt refrigerated cabinets ☐ PNC 880297
- 4 central PVC grids for 1300lt refrigerated cabinets ☐ PNC 880298
- Kit of 5 wheels (front with brake) for cabinets and counters ☐ PNC 880301




Digital Cabinets
Benefit - 4 Half Doors Digital Refrigerator, Stainless Steel - 1300 lt
The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Front

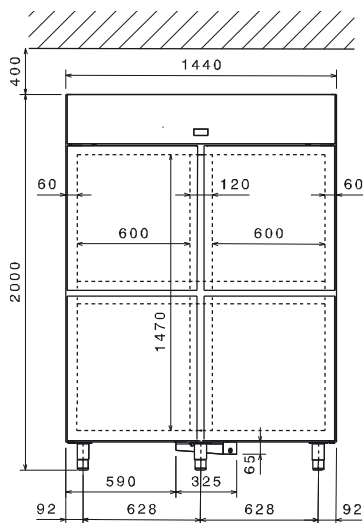


Side

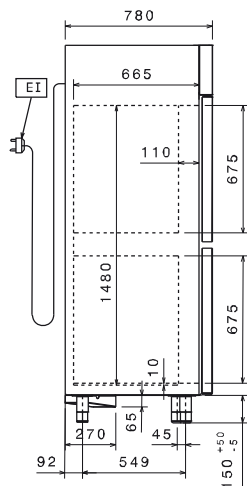

EI = Electrical inlet (power)
 RI = Refrigerant Inlet
 RO = Refrigerant Outlet

Top



Electric

Supply voltage:

790002 (SB130P4D) 220-230 V/1 ph/50 Hz
 790046 (SB130P4D6) 220 V/1 ph/60 Hz

Electrical power max.:

0.55 kW

Key Information:

Gross capacity:

1300 lt

Door hinges:

External dimensions, Width: 1440 mm

External dimensions, Height: 2000 mm

External dimensions, Depth: 788 mm

External dimensions, Depth with Doors Open: 1450 mm

Number and type of doors: 4x1/2 Full

Number and type of grids (included): 8 - GN 2/1

Type of external material: Stainless Steel

Type of internal material: Stainless Steel AISI 304

Number of positions & pitch: 0; 0 mm

Scotch Brite

0; 0 mm

Refrigeration Data

Compressor power:

790002 (SB130P4D) 1/3 hp

790046 (SB130P4D6) 1/4 hp

Refrigerant type: R404A

Operating temperature min.: -2 °C

Operating temperature max.: 10 °C

Operating mode: Ventilated

Cooling unit: Built-In

Defrost type:

790002 (SB130P4D) Electric

790046 (SB130P4D6) Electric