# H3EA Element SST CE UK

Height: 20.4" Width: 8.3" Depth: 22.2" (51.8cm) (21.1cm) (56.4cm)



- LED display provides simple temperature adjustment
- Thinsulate® tank insulation provides increased energy efficiency
- Digital thermostat provides consistent and accurate temperatures of 15.6-96C (Deg) (60-205F MAX)
- Contemporary, low-profile design for front-of-house and self-service settings
- Matching Blue LED dispense button
- Programmable "Energy Saver Mode" reduces operating costs during idle periods
- 196mm (7.75in) cup clearance accommodates a range of serving options for custom-crafted, hand pour coffees and teas

Agency:

(

# **Specifications**

Product #: 45300.0000 Dispense: Portion Control
Water Access: Plumbed Dispense: Push Button

Finish: Stainless

**Temp. Setting:** 205°F (96.111°C)

# **Electrical & Capacity**

Volts*		Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
	220-240	11.5-12.5	2500-3000	-	-	-	60°F (15.5°C)	1	2	50-60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements


PSI	kPa Fitting Supplied		Water Flow Required (GPM)		
20-90	138-621	3/4" BSPP	-		

#### **CAD Drawings**

Additional Features

2D	Revit	KLC
•		



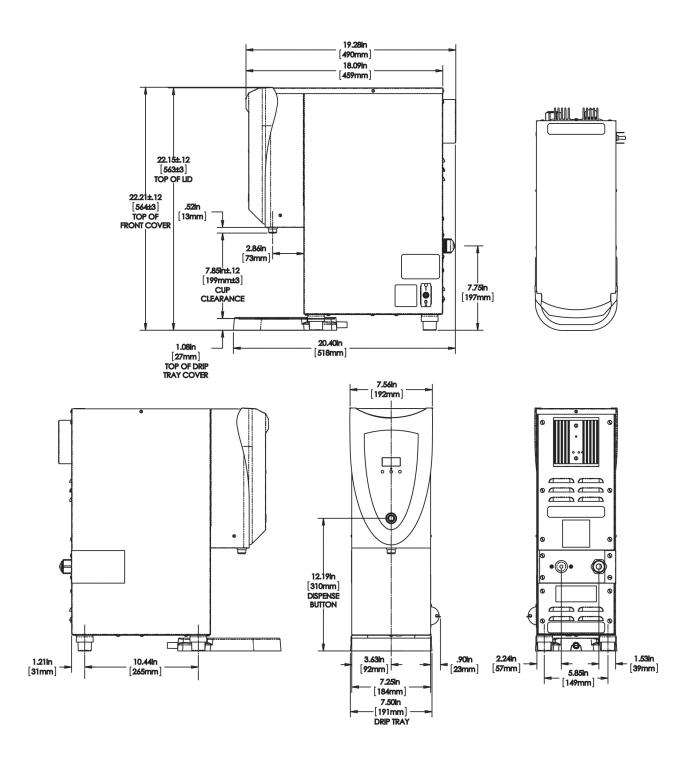

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	20.4 in.	8.3 in.	22.2 in.	32.3 in.	10.8 in.	21.9 in.	34.000 lbs	4.423 ft <sup>3</sup>
Metric	51.8 cm	21.1 cm	56.4 cm	82.1 cm	27.5 cm	55.6 cm	15.422 kgs	0.125 m³



# Related Products & Accessories: H3EA Element SST CE UK(45300.0000)

TRAY, DRIP H3E ELEMENT

Product #: 48885.0001



# Serving & Holding Options: H3EA Element SST CE UK(45300.0000)

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

