





MANUFACTURER

HALLDE

MODEL

RG-350


PRODUCT DESCRIPTION

Vegetable Preparation Machine, process up to 15 kg/minute.

ORIGIN

Sweden

| | - | | | | |
|--------------------------|---|------------|----------|----------------|---------------------|
| SPECIFICATION | | | | | |
| SPECIFICATION TEXT | Vegetable preparation machine with leaning design and full moon feed cylinder, made to process up to 15 kg/minute or 1 500 portions/day. Machine has aluminium pusher plate with loop shaped stainless steel handle and a tube feeder of 59 mm in diameter. Pusher plate with system for leverage effect. 5.7 litre feed cylinder with 62 mm inner wall. Cutting tools are made of stainless steel/aluminium with removable knifes/plates and are 215 mm in diameter. Motor rotate the cutting blade clockwise and direct without intermediate belts. | | | | |
| FUNCTION | Machine for slicing, dicing, shredding, grating, cutting julienne and French fries. Processes fruit, vegetables, dry bread, cheese, nuts, mushrooms, etc. | | | | |
| CAPACITY | Up to 1 500 portions/day. Up to 15 kg/minute. | | | | |
| MATERIAL | Machine base and feed cylinder: aluminium alloy. Push handle: stainless steel. Cutting tools: Stainless steel/ Aluminum. | | | | |
| MOTOR | 0.75 kW. One-speed (360 rpm) Manual Feeder: 220-240 V, 1-phase, 50-60 Hz. 220-240 V, 3-phase, 50-60 Hz. 120 V, 1-phase, 60 Hz. 380-415 V, 3-phase, 50 Hz. 440-460 V, 3-phase, 60 Hz. Thermal protection, Planetary gearing. | | | | |
| POWER SUPPLY | Earthed, single alt. three phase, 10 A / three phase, 16 A. Fuse: 10 A delayed action fuse. | | | | |
| STANDARDS | EN 1678+A1:2010. NSF/ANSI Standard 8. | | | | |
| RECOMMENDED | INCLUDING | | | | NET WEIGHT |
| CUTTING TOOL PACKAGES | 6-pack Cutting Tools Slicer 1.5 mm | | | | 6 kg |
| | 9-pack Cutting Tools Slicer 1.5 mm | | | | 9 kg |
| WEIGHT/VOLUME | CONTENT | NET WEIGHT | PACKAGES | FREIGHT WEIGHT | FREIGHT VOLUME |
| | RG-350 Machine | 32 kg | 1 | 36 kg | 0.198 m³ |
| | Container Trolley incl. GN 1/1 container | 9 kg | 1 | 12.5 kg | 0.15 m ³ |
| | Machine Table incl. GN 1/1 container | 13,25 kg | 1 | 14,5 kg | 0,8 m³ |
| SAFETY | 2014/30/EU, 2014/35/EU, 2006/42/EG, 2011/65/EU, no 10/2011 | | | | |
| DIRECTIVE AND REGULATION | CE approved. Two safety switches, machine safety: IP44, push buttons safety: IP65. | | | | |

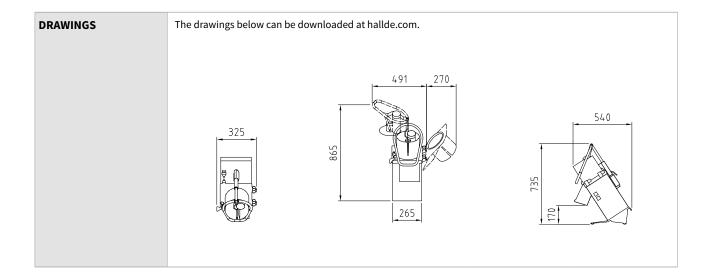

AB Hällde Maskiner P.O. Box 1165, SE-164 26 KISTA, Sweden phone +46 8 587 730 00