

Product	Commercial Induction Quadruple Burners Range (Table Top)	Quantity		Item#	
---------	--	----------	--	-------	--



Standard Features

- 4 separate power control knobs for independent operation and functionality.
- Simple control: use the power control knob to switch on/off,
- Turn the power control knob to make step-less power regulation
- Each induction burner (hob) is 3500 watts (maximum output), total 14,000 watts.
- In case of error, LED lamp will blink error codes enabling user to diagnose and correct minor problems
- Integral grease filter to ensure clean air intake
- Internal cooling fan to keep internal electronics cool
- Built-in pan detection: Minimum pot diameter
 120mm
- Automatic pan detection provides instant energy transmission to pan and automatic switch off when pan is not present.
- Automatic power adjustment when ambient temperature rises too high or in case of empty pan heating to prevent overheating

- Easy to clean high-impact glass-ceramic top surface
- Pan characterization feature measures pan almost instantly to allow unit to supply optimal power to each pan at every setting

Qingdao Middleby Induction Co., Ltd.


9 Xinghai Road, Huanhai Economical Development Zone, Chengyang District, Qingdao 266108, P.R. China



Phone: +86532-8667-2001

Fax: +86532-8667-2003



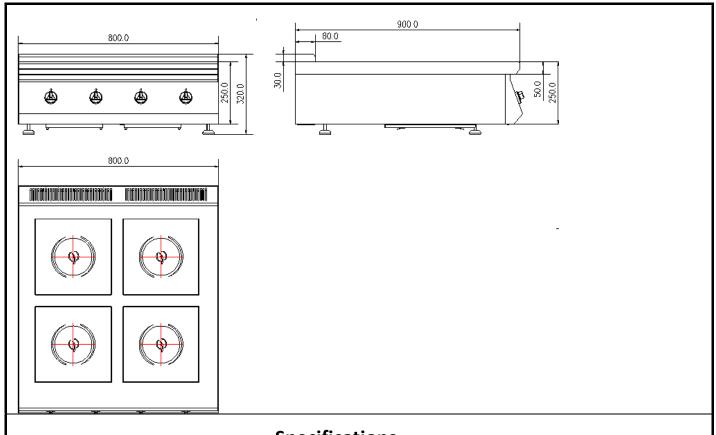

Specifications

Model Number	IND-E0P-L3500*4T
Power Requirements	3N~400V AC, 3Phase 5 Wires
Power Consumption	14,000W(MAX)
BTU Comparison	124,000BTU
Amperage	32A(MAX)
Ceran Glass	4 pieces of 300*300 SCHOTT Ceran Glass
Housing Material	SUS304, T=1.0mm
Dimensions(mm)	800*900*290*30
Weight(kg)	61
Packaged Dimensions(mm)	900*1000*500
Packaged Weight(kg)	81
Power Cord Length	Not Included
Plug Type	Not Included
Warranty	1 year

Qingdao Middleby Induction Co., Ltd.

9 Xinghai Road, Huanhai Economical Development Zone,

Chengyang District, Qingdao 266108, P.R. China



Phone: +86532-8667-2001

Fax: +86532-8667-2003