



Electrolux

Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



371002 (E7GCGH4CG0)

700XP 4 GAS BURNERS 5.5
kW ON GAS OVEN - LPG/
NATURAL GAS

Short Form Specification

Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to have stainless steel feet with height adjustment up to 50 mm.
- The four 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed enamelled steel base plate.
- Oven thermostat adjustable from 110 °C to 270 °C.
- Double skinned door with pressed internal panel for heat insulation.
- IPX 4 water protection.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250


Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Junction sealing kit PNC 206086 ☐
- Draught diverter, 150 mm diameter PNC 206132 ☐
- Matching ring for flue condenser, 150 mm diameter PNC 206133 ☐


APPROVAL: _____

- | | | | |
|---|------------|---|------------|
| • Kit 4 wheels - 2 swivelling with brake - it is mandatory to install base support and wheels | PNC 206135 | • Rear paneling - 1000mm (700/900) | PNC 206375 |
| • Flanged feet kit | PNC 206136 | • Rear paneling - 1200mm (700/900) | PNC 206376 |
| • Frontal kicking strip for concrete installation, 800mm | PNC 206148 | • Kit town gas nozzles (G150) for 700 gas range | PNC 206387 |
| • Frontal kicking strip for concrete installation, 1000mm | PNC 206150 | • 2 side covering panels for free standing appliances | PNC 216000 |
| • Frontal kicking strip for concrete installation, 1200mm | PNC 206151 | • Frontal handrail, 800mm | PNC 216047 |
| • Frontal kicking strip for concrete installation, 1600mm | PNC 206152 | • Frontal handrail, 1200mm | PNC 216049 |
| • Frontal kicking strip, 800mm (not for refr-freezer base) | PNC 206176 | • Frontal handrail, 1600mm | PNC 216050 |
| • Frontal kicking strip, 1000mm (not for refr-freezer base) | PNC 206177 | • Large handrail - portioning shelf, 800mm | PNC 216186 |
| • Frontal kicking strip, 1200mm (not for refr-freezer base) | PNC 206178 | • Double burner smooth plate for direct cooking | PNC 921684 |
| • Frontal kicking strip, 1600mm (not for refr-freezer base) | PNC 206179 | • Double burner ribbed plate for direct cooking | PNC 921685 |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill) | PNC 206210 | • Pressure regulator for gas units | PNC 927225 |
| • Flue condenser for 1 module, 150 mm diameter | PNC 206246 | | |
| • Pair of side kicking strips | PNC 206249 | | |
| • Single burner smooth plate for direct cooking - fits frontal burners only | PNC 206260 | | |
| • Single burner ribbed plate for direct cooking- fits frontal burners only | PNC 206261 | | |
| • Single burner radiant plate for pan support | PNC 206264 | | |
| • Pair of side kicking strips for concrete installation | PNC 206265 | | |
| • Water column with swivel arm (water column extension not included) | PNC 206289 | | |
| • Water column extension for 700 line | PNC 206291 | | |
| • Stainless steel double grid for 2 burners | PNC 206297 | | |
| • Chimney upstand, 800mm | PNC 206304 | | |
| • Right and left side handrails | PNC 206307 | | |
| • - NOT TRANSLATED - | PNC 206308 | | |
| • Wok pan support for open burners (700/900) | PNC 206363 | | |
| • Base support for feet or wheels - 800mm (700/900) | PNC 206367 | | |
| • Base support for feet or wheels - 1200mm (700/900) | PNC 206368 | | |
| • Base support for feet or wheels - 1600mm (700/900) | PNC 206369 | | |
| • Base support for feet or wheels - 2000mm (700/900) | PNC 206370 | | |
| • Rear paneling - 800mm (700/900) | PNC 206374 | | |

Front

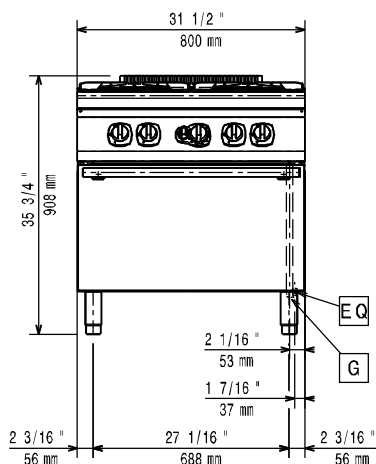


Side

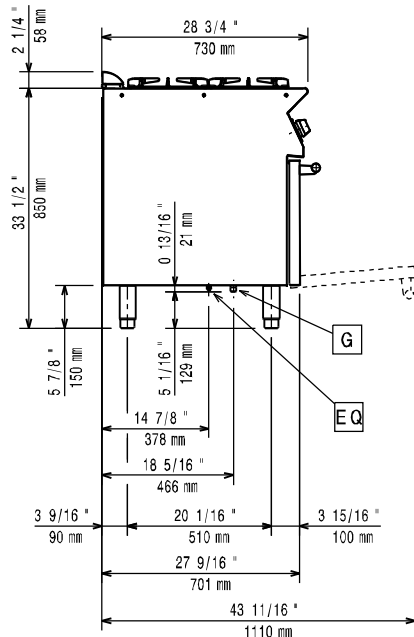

G = Gas connection

Top

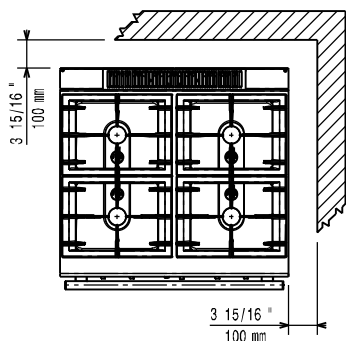

Gas

Gas Power:	371002 (E7GCGH4CG0)	95452 Btu/hr (28 kW)
Standard gas delivery:		Natural Gas
Gas Type Option:		LPG;Town
Gas Inlet:		1/2"

Key Information:

Front Burners Power:	5.5 - 5.5 kW
Back Burners Power:	5.5 - 5.5 kW
Back Burners Dimension - mm	Ø 60 Ø 60
Front Burners Dimension - mm	Ø 60 Ø 60
Oven working Temperature:	110 °C MIN; 270 °C MAX
Oven Cavity Dimensions (width):	540 mm
Oven Cavity Dimensions (height):	300 mm
Oven Cavity Dimensions (depth):	650 mm
Net weight:	85 kg
Shipping weight:	100 kg
Shipping height:	1080 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.76 m ³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.